

UNCLASSIFIED

AD 274 259

*Reproduced
by the*

**ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA**



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NDL-TR-24



**Cold Weather
Decontamination Study
- McCoy I**

by

Joseph C. Maloney

John L. Meredith

January 1962

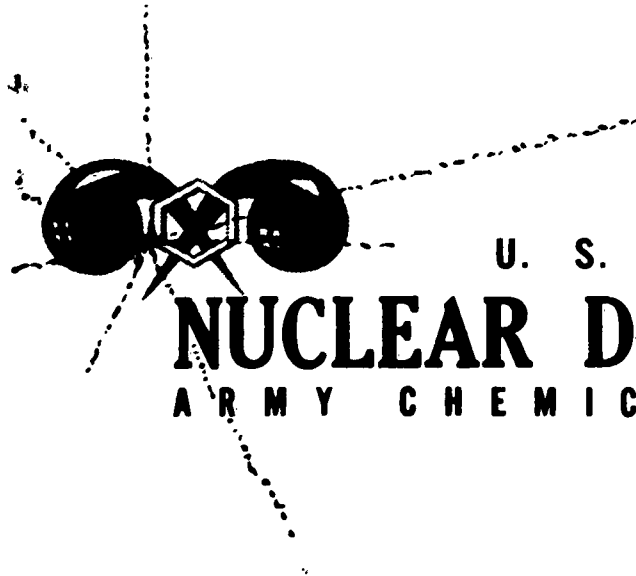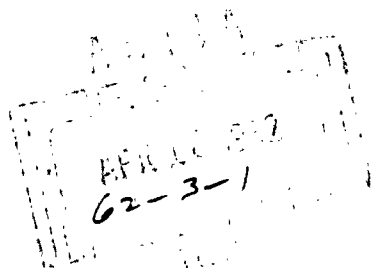

U. S. ARMY CHEMICAL CORPS
NUCLEAR DEFENSE LABORATORY
ARMY CHEMICAL CENTER • MARYLAND

274259
CATHODIC BY ASTH
AS AD NO.

Qualified requesters may obtain copies of this report from
Armed Services Technical Information Agency, Arlington Hall
Station, Arlington 12, Virginia, ATTN: TIPCR

January 1962

NEL-TR-84

COLD WEATHER DECONTAMINATION STUDY - MCCOY I

by

Joseph C. Maloney
John L. Meredith

Nuclear Testing Division

Recommending Approval:



DAVID L. RIGOTTI
Chief, Nuclear Testing Division

Approved:



HEBER C. BRILL
Lt. Colonel, CMIC
Commanding

U. S. ARMY
Chemical Corps Research and Development Command
CHEMICAL CORPS NUCLEAR DEFENSE LABORATORY
Army Chemical Center, Maryland

FOREWORD

This is an interim report that shows progress through FY-61. Conclusions and application of data must be viewed with caution because they are susceptible to change as further work develops.

The work was authorized under DASA Project A-8 10.06, Cold Weather Decontamination, Project 4X12-01-001-02, Decontamination (U), with supplemental funding from the U. S. Navy Bureau of Yards and Docks. The work was started in February 1960 and is being continued. Completion is expected in June 1962.

Acknowledgments

The authors wish to acknowledge the assistance of the personnel of the U. S. Naval Radiological Defense Laboratory, who designed and procured the fallout simulant production apparatus, and of the Cook Electric Company, who conducted the field phase of the operation.

Notice

Reproduction of this document in whole or part is prohibited except with the permission of the issuing office; however, ASTIA is authorized to reproduce the document for U. S. Governmental purposes.

Disposition

When this document has served its purpose, DESTROY it. DO NOT return the document to the U. S. Army Nuclear Defense Laboratory.

DIGEST

The objective of this work, as reported herein, is to obtain necessary data for preparation of a cold-weather supplement to technical manual, TM 3-225, Radiological Recovery of Fixed Military Installations. This report covers progress during FY-61.

A facility capable of producing 500-lb batches of fallout simulant, tagged with 5 curies of lanthanum-140, was designed, installed, and operated at Camp McCoy, Wisconsin. A series of decontamination tests, limited by improper weather conditions, was conducted using techniques of snow plowing, power sweeping, and fire hosing.

The following evidence, based on the fragmentary information obtained during this test series, should be considered tentative and subject to change.

1. The decontamination techniques of grading, sweeping, and hosing on applicable cold-weather surfaces are less effective than the same techniques on corresponding temperate-weather surfaces.

2. Mechanized sweeping and vacuum sweeping of packed snow and frozen soil are effective decontamination techniques.

3. The possibly unique decontamination technique of water hosing packed snow and frozen soil is apparently without merit.

Radiation dosage was kept to a minimum by the experimenters and no residual dosage problems were encountered. Normal camp activities were resumed 30 days after the conclusion of the testing period.

MILITARY APPLICATION

The available decontamination technical manuals, TM 3-220* and TM 3-225**, are inadequate for planning radiological countermeasures under cold-weather conditions. This report covers the progress of the FY-61 effort to obtain information to correct this deficiency.

* Decontamination. TM 3-220. October 1953

** Radiological Recovery of Fixed Military Installations. TM 3-225. (NAVDOKS TP-PL-13). Int. rev. April 1958.

CONTENTS

	<u>Page</u>
I. INTRODUCTION.	5
A. Objective.	5
B. Justification and Requirements	5
C. Historical Background.	5
II. EXPERIMENTAL PROCEDURES AND FACILITIES.	6
A. Operational Plans.	6
B. Fallout Simulant	8
C. Mechanized Equipment Operation	8
D. Radiological Instruments and Survey Procedures	10
E. Narrative Outline of Operation Schedule.	10
III. EXPERIMENTAL RESULTS AND DISCUSSION	12
A. Results.	12
B. Discussion	15
IV. CONCLUSIONS	16
LITERATURE CITED.	17
APPENDIXES.	19
A. Cold-Weather Background Data	20
B. Test-Site Criteria and Selection	27
C. Simulant Production Facilities and Procedures.	31
D. Experimental Data	51
E. Health-Physics Data.	64

CONTENTS

	<u>Page</u>
I. INTRODUCTION.	5
A. Objective.	5
B. Justification and Requirements	5
C. Historical Background.	5
II. EXPERIMENTAL PROCEDURES AND FACILITIES.	6
A. Operational Plans.	6
B. Fallout Simulant	8
C. Mechanized Equipment Operation	8
D. Radiological Instruments and Survey Procedures . . .	10
E. Narrative Outline of Operation Schedule.	10
III. EXPERIMENTAL RESULTS AND DISCUSSION	12
A. Results.	12
B. Discussion	15
IV. CONCLUSIONS	16
LITERATURE CITED.	17
APPENDIXES.	19
A. Cold-Weather Background Data	20
B. Test-Site Criteria and Selection	27
C. Simulant Production Facilities and Procedures. . . .	31
D. Experimental Data	51
E. Health-Physics Data.	64

COLD WEATHER DECONTAMINATION STUDY - McCOY I.

1. INTRODUCTION.

A. Objective.

The objective of this study is to conduct experiments and collate data pertinent to radiological decontamination under cold-weather conditions, so that the necessary data is available for publications of a cold-weather addendum to technical manual TM 3-225 (NAVDOKS TP-PL-13), Radiological Recovery of Fixed Military Installations.

B. Justification and Requirements.

TM-3-225 presents methods and data necessary to perform decontamination operations on fixed military installations under temperate-weather conditions. The application of basic recovery criteria contained in this manual will have to be modified, or alternate methods employed, for decontamination operations under cold-weather conditions. Large portions of the United States could be affected for an extended period of time by cold weather (-10° to $+32^{\circ}\text{F}$), thus affecting any contemplated decontamination operation.

This project is part of the FY-61 Defense Atomic Support Agency (DASA) coordinated program, Nuclear Weapons Effects - Fallout, with additional support from the U. S. Navy Bureau of Yards and Docks.

C. Historical Background.

Radiological decontamination has been intensively investigated during the past decade by a number of different agencies. The experimental effort has ranged from laboratory studies, through nuclear weapons test operations, to comprehensive studies involving areas up to 5 acres. Practically all of this work has been accomplished under temperate-environmental conditions and has been previously reported.¹⁻²³ The manual, TM 3-225, Radiological Recovery of Fixed Military Installations,²⁴ was based on the results of these investigations.

In 1958, the U. S. Naval Radiological Defense Laboratory (USNRDL) prepared a study of the potential delay in radiological recovery due to cold weather encountered in the United States.²⁵ In this study, the concept of a hosing cutoff temperature was introduced. Operations involving water would not be considered feasible below this conceived value. Since there were no data upon which to estimate the water hosing cutoff temperature, the analysis of data presented the potential delay for a series of possible cutoff temperatures down to 0°F . For a hypothetical cutoff temperature of 0°F , negligible delay would result for normal winter temperatures based

on climatological studies of the United States; however, delays would increase if the cutoff temperature were higher. At a cutoff temperature of 30°F, the mission recovery time would be delayed for more than a month.

Early in 1960, the Naval Civil Engineering Laboratory (NCEL), with the assistance of the U. S. Army Chemical Corps, conducted a series of tests at Fort Greely and Point Barrow, Alaska, to determine (1) the cutoff temperature of water for hosing and building washdown, (2) the effectiveness of power sweepers on packed snow, and (3) the surface softening of frozen ground by freezing point depressants. Local sand (nonradioactive) was used as the fallout simulant in these tests, thus yielding only qualitative results. From these tests, the following information was obtained: (1) water spray from fire hoses and building washdown nozzles did not freeze at windchill values to 1450 at 9°F (see Windchill Index, figure A-2, appendix A) where windchill is defined as the combined effect of wind and air temperature on heated bodies, and is expressed in kilocalories per square meter per hour; (2) slow leaks and windborne mist did freeze; (3) the water runoff did not immediately freeze, and still runoff water took 15 min to crust when in contact with ocean ice at 7°F and at a windchill index of 1200; (4) power sweepers were effective on packed snow except at temperatures near freezing; (5) at these near-freezing temperatures, surface softening caused by the onset of thawing apparently trapped the contaminant, preventing the sweeper from effectively picking it up. The use of salt depressants to soften ground surface did not appear to be effective.

A report of known cold-weather decontamination information²⁶ has been prepared by NCEL, largely based on the foregoing tests, to form the basis of an interim cold-weather supplement to TM 3-225.

The findings of a background literature search by this Laboratory on cogent coldweather factors are summarized in appendix A.

II. EXPERIMENTAL PROCEDURES AND FACILITIES.

A. Operational Plans.

A series of decontamination trials (table 1) was planned to be conducted in the field at temperatures between -10° and +32°F. The operational test site chosen was Camp McCoy, Wisconsin, where the proper environmental weather conditions would be expected and where adequate logistic support and test areas were available. A discussion of test-site requirements and a description of the Camp McCoy site are presented in detail in appendix B. Each decontamination trial was planned to be conducted on a 20- by 100-ft surface area. This size area is large enough for mechanical equipment to operate efficiently, and for an adequate number of radiation measurements to be taken.

TABLE 1

DECONTAMINATION TRIALS PLANNED

Type of surface contaminated	Method of decontamination	Temperature range of test		
		From -10° to 5°F	From 5° to 20°F	From 20° to 32°F
Bare frozen ground	Fire hosing	X	X	X
	Mechanized sweeping	X	X	X
	Mechanized blade scraping	X		
	Vacuum sweeping	X	X	X
Bare asphalt pavement	Fire hosing	X		
	Mechanized sweeping	X		
Bare concrete pavement	Fire hosing	X		
	Mechanized sweeping	X		
Packed snow	Fire hosing	X	X	X
	Vacuum sweeping	X	X	X
	Mechanized sweeping	X	X	X
	Mechanized blade scraping	X	X	X
Packed snow, covered by loose snow	Mechanized scraping and/or mechanized sweeping	X	X	X
	Mechanized blade scraping	X		
Loose snow	Mechanized rotary scraping	X		
Roofs (bare)	Fire hosing	X	X	X

The only deviation in test-area size was the use of a 20- by 60-ft building roof.

Operations involved preparing a radiation fallout simulant, spreading the simulant on test areas, performing decontamination trials, and finally, disposing of the radioactive waste.

B. Fallout Simulant.

The USNRDL has developed a fallout simulant consisting of lanthanum-140 (La^{140}) tagged smooth sand. Much of the recent experimentation at Camp Parks has been conducted with a 150 μ to 300 μ simulant deposited at a mass level of 50 gm/sq ft. These physical characteristics of fallout correspond to their model downwind-fallout deposit from a land-surface fission detonation of 1-Mt yield at the H+1 hr intensity of 2,000 r/hr. For convenience in comparison of results, these fallout parameters were also used by this project.

The sand was coated with La^{140} as a radioactive tracer, at a specific activity of 10 $\mu\text{C/gm}$. This isotope has several gamma-ray energies in the range of 0.33 to 3 Mev, with principal peaks at 0.33, 0.49, 0.815, and 1.6 Mev. Its half life of 40.2 hr makes it a convenient tracer, in that rapid radioactive decay would eventually eliminate any residual activity. The tagged sand was further treated by coating with sodium silicate solution and then by baking for 1 hr at 1000°C. This treatment was necessary to firmly bond the isotope to the sand, in order to prevent any leaching of activity to the environment.

The fallout simulant was loaded into a dump truck equipped with a Burch Hydron spreader. This device is a dump-truck accessory designed to uniformly spread granular material onto road surfaces. In operation, a path approximately 7 ft wide could be spread on pavement, soil, and packed snow; thus, three adjacent passes were necessary to contaminate the 20-ft wide test areas. For the roof test, a 2-ft wide Scott lawn spreader, equipped with extension handle and tachometer, was used for contamination operations. Radiation fields of 30 mr/hr intensity levels were produced.

A detailed description of the fallout-simulant preparation, handling, and spreading is presented in appendix C.

C. Mechanized Equipment Operation.

The following mechanized equipment was used in the preparation of test areas and in the various decontamination tests:

Front-End Loader, Crawler, D-4 Tractor
Dump Truck, 2½ Ton, 6 x 6
Bulldozer, D-8

Motor Grader, Caterpillar, Model 12
Pneumatic Roller, Towed
Sweeper, Vacuum, Tennant, Model 100
Sweeper, Mechanized, Conveyor, Model 1000-4
Fire Engine, Pumper

The front-end loader and dump truck were used for general utility work, such as removal of windrows of snow from blade-plowing (scraping) operations and removal of radioactive waste resulting from sweeping operations. Because it was necessary to remove the snow cover, the bulldozer was used to prepare the bare, frozen soil test areas. The Model 12 Caterpillar was used as a mechanized grader to finish-grade the areas scraped by the bulldozer. It was also used as a blade-type snow plow for decontamination operations. The pneumatic roller was used to prepare packed-snow surfaces in the test area. It was pulled by either the front-end loader or bulldozer. The two sweepers and fire engine were used as decontamination apparatus. Both sweepers incorporated horizontal road brooms that swept material into a bin. The Tennant machine also incorporated a vacuum pickup and cloth filters to retain the dust generated by the road broom. The fire engine was used to boost hydrant pressures to supply two 1½-in. hose streams at 40-psi nozzle pressure.

The decontamination operations were conducted in the following manner:

1. Motor Grading.

Packed snow was decontaminated by scraping approximately 2 in. of snow from the surface. All scraping passes were made with the grader moving in the same direction, and windrows formed were subsequently pushed aside by the following overlapping pass. The final windrows were left about 10 ft to the side of the test area. The operation was then repeated to remove another 2-in. layer from the surface of the test area.

Snow windrows were removed from the vicinity of the test areas by loading the snow into a dump truck with the front-end loader. The contaminated snow was transported to the dump area.

2. Mechanized Sweeping.

The test areas were decontaminated with the mechanized sweeper by making several slightly overlapping lengthwise passes over the area, all in the same direction. The sweeper-collection bin was emptied in the dump area.

3. Vacuum Sweeping.

The test areas were decontaminated with the vacuum sweeper by making lengthwise passes over the area in both directions. The sweeper-collection bin was emptied in the dump area.

4. Fire Hosing.

The land areas were firehosed by two men, each with a 1½-in. hose. The hosing started at one end of the area and worked to the other end. The roofs were washed by lobbing the water onto them from ground positions. All hosing operations were conducted by personnel of the Post fire department.

D. Radiological Instruments and Survey Procedures.

The AN-PDR/27c Radiac was employed for all radiological measurements. A portable 3-ft-high wooden stand was used in conjunction with the Radiac to support the instrument at a constant height, and to reduce the difficulties associated with handling small instruments with heavily gloved hands. On the 20- by 100-ft areas, measurements were made at 20-ft intervals along the centerline of each of the three adjacent spreads of simulant, as shown in figure 1. The same grid intersection points were used for measurements on the shorter 20- by 60-ft roof.

Measurements were taken before and after decontamination. The natural background was insignificant as compared to all actual radiation levels and could be ignored.

E. Narrative Outline of Operation Schedule.

During the period from July to November 1960, the simulant production apparatus was designed, components purchased, and necessary shop work performed at the USNRDL facilities at San Francisco and Camp Parks, California. Also, during this period, the test sites under consideration were inspected, selection was made, and plans formulated for the conduct of tests. Official permission was obtained from Headquarters, Fifth U. S. Army, for the use of Camp McCoy and the available logistics supplies there. In order to insure that the restrictive set-up and testing-period time limitations could be met and that ample technical manpower would be available, it was decided to negotiate a contract with a research and development concern. Such a contract was negotiated and let to the Cook Research Laboratories of Morton Grove, Illinois, a division of Cook Electric Company.

The simulant-production apparatus and other test gear were shipped to Camp McCoy in December 1960. The contract was effective 3 January 1961 and the field-effort phase was begun immediately.

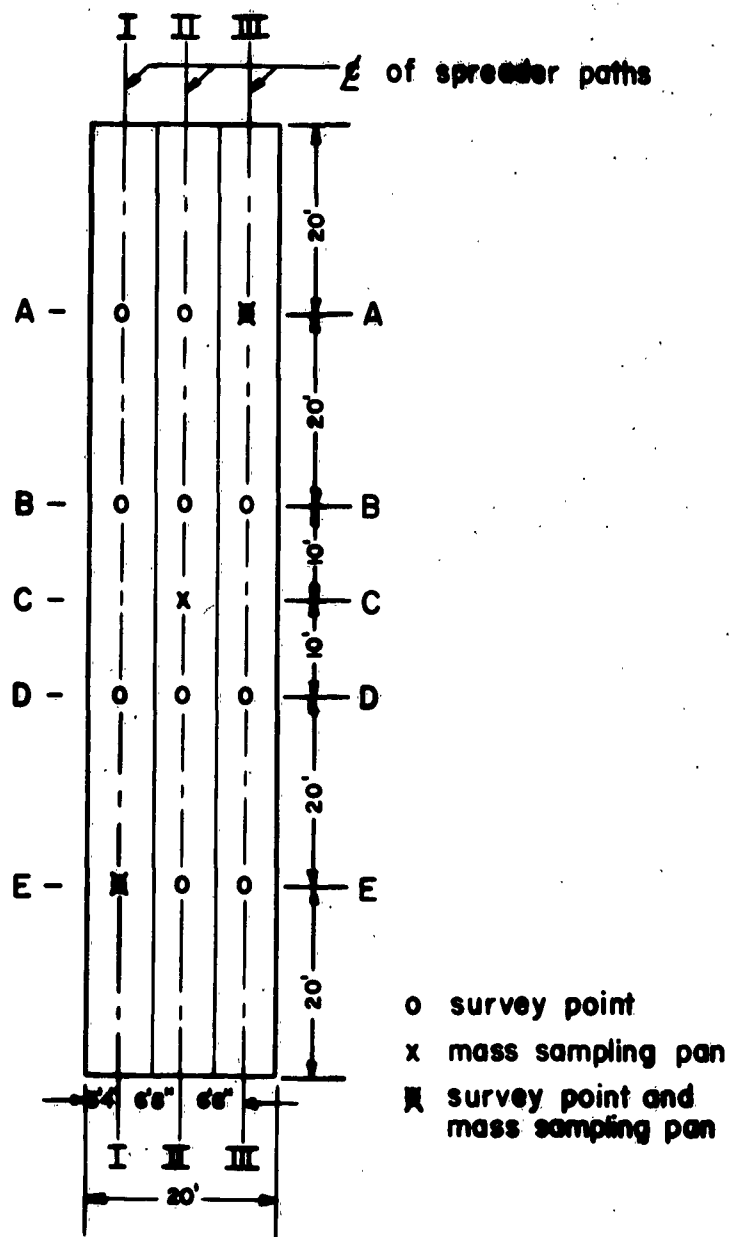


FIGURE
SURVEY GRID FOR THREE SPREADS OF SIMULANT

January and February 1961 were spent setting up the hot cell and production apparatus, installing sand-bag shielding around expected high-dosage sources and occupied operator positions, training personnel, and conducting dry runs.

By 1 March 1961 the project was in a ready state for testing; however, temperatures were unseasonably warm, and there was a lack of snow until the week of 5 March 1961. This snow lasted only long enough for a tracer-level hot run. Difficulties in hot plant operation and field procedures were ironed out, however, and upon the arrival of a significant snowfall during the following week it was possible to conduct nine of the desired tests. In this period, the daytime temperatures rose above the freezing mark, while the night-time temperatures fell within the range of 10° and 25°F. It was necessary to run the tests during the predawn to 0900 hr period to experience suitable environmental conditions. By the end of the week a thaw set in, effectively halting any further testing for that season.

III. EXPERIMENTAL RESULTS AND DISCUSSION.

A. Results.

The data collected from the field tests consist of (1) radiation measurements over the test area before and after decontamination, (2) mass level and specific activity of the simulant, (3) decontamination time and operator dose rate, and (4) air temperature. The detailed data, as summarized in table 2 of the text, are given in appendix D.

The results from the analysis of data are given in table 3. Two values for per cent decontamination are given for each test. These values were derived by considering a test area's mean radiation measurements for the total area per cent decontamination, and by using each measurement position per cent decontamination to obtain an average value for the test.

Based only on the radiation measurement data, comparisons of the various test results were made by statistical analysis using an 80% confidence level. The results of these comparisons are as follows:

1. There is no significant decontamination of packed snow or bare frozen ground by firehosing.
2. There is no significant difference in the decontamination of bare frozen ground by vacuum sweeping or mechanized sweeping techniques.
3. There is a significant difference between the first and second decontamination passes of the mechanized sweeper on bare frozen ground.

TABLE 2

SUMMARY OF RADIATION MEASUREMENT DATA

Test number	Surface type a/	Size of area	Method of decontamination	Atmospheric temperature	Contaminated area			Decontaminated area (one pass)			Decontaminated area (two passes)	
					Mean level	Specific activity	Mean radiation level b/	Decontamination time	Mean radiation level b/	Decontamination time	Mean radiation level b/	
		ft		°F	g/ft ²	μc/g	mr/hr	min	mr/hr	min	mr/hr	
I	HFG	100 x 20	VS	31	42.4	4.0	23.6	3	1.9	---	---	
II	HFG	100 x 20	MS	31	44.0	3.8	22.1	6	6.6	15	2.8	
III	HFG	100 x 20	PH	8	32.3	9.0	28.3	10	26.3	---	---	
IV	PS	100 x 20	PH	13	47.0	8.7	30.1	20	27.5	---	---	
V	HR	60 x 20	PH	21	---d/	8.8	18.5	15	3.1	---	---	
VI	PS	100 x 20	MZ	24	47.8	9.3	26.1	15	7.1	60 g/	7.1 g/	
VII	PS	100 x 20	VS	25	26.7	8.5	25.3	20	8.3	---	---	
VIII	PS	100 x 20	MS	26	33.7	8.9	31.0	--- d/	--- d/	20	8.0	
IX	LS on PS	100 x 20	MZ	24	31.9	5.4	21.5	10	8.0	---	---	

a/ HFG Bare frozen ground VS Vacuum sweeping
 PS Packed snow MS Mechanized sweeping
 LS Loose snow MZ Mechanized grading (blade scraping or "snow plow")
 HR Bare roof PH Fire hosing
 b/ Radiation level readings corrected for position over area, instrument calibration, and decay
 c/ Data for after windrow removal
 d/ No data

TABLE 3

DECONTAMINATION PERCENTAGES IN FIELD TESTS

Test number	Surface type *	Method of decontamination **	Area of decontamination		Measurement point of decontamination	
			Range for total area	Average for total area	Range for total area	Average for total area
I	BFG	VS	89.0-94.9	91.9	88.9-94.9	91.9
II	BFG	MS	83.3-91.4	87.3	81.7-93.3	87.5
III	BFG	FH	0.4-13.8	7.1	1.0-12.8	6.9
IV	PS	FH	1.0-16.3	8.6	0.9-21.9	8.3
V	BR	FH	64.9-100.0	83.2	76.5-89.1	82.8
VI	PS	MG	65.5-80.1	72.8	61.5-83.9	72.7
VII	PS	VS	55.7-78.7	67.2	62.0-71.8	66.9
VIII	PS	MS	66.1-82.3	74.2	68.2-80.6	74.4
IX	LS on PS	MG	54.0-71.6	62.8	51.6-72.2	61.9

* BFG Bare frozen ground
 PS Packed snow
 LS Loose snow
 BR Bare roof

** VS Vacuum sweeping
 MS Mechanized sweeping
 MG Mechanized grading
 FH Fire hosing

4. There is no significant difference in the decontamination effectiveness of motor grading on packed snow areas before and after windrow removal.

5. There is no significant difference in the effectiveness of decontamination of a packed snow area among the three methods: motor grading; mechanized sweeping; or vacuum sweeping.

B. Discussion.

Because of the assumed instrument error (+10%), the statistical analysis of the field data resulted in large confidence ranges. If this same data had been obtained from a hypothetical "perfect" meter, the ranges would have been even larger and due singly to variations in decontamination effectiveness. It is more probable that the actual instrument error is larger than the assumed value and the true variations of the decontamination percentages are smaller than those presented in this report. As analyzed in this report, the true mean percentages of decontamination has an 80% chance of being within the given ranges.

It may be noted from the experimental results that the two decontamination percentages calculated for each test have nearly identical means but slightly different ranges. It is necessary, therefore, to prescribe the use of each. The total area mean and range of percentages should be used only for comparison of tests with similar parameters, such as area size, instruments, and methods. In other words, their use is restricted to the comparison of tests in this series. The position by position (pairing observations) values can be used, within limitations, for comparison with results of other tests and for possible extrapolation of results to large or infinite areas.

The test results can be compared with previous work under temperate environmental conditions performed by USNRDL. The use of mechanized sweepers and vacuum sweepers on soil and snow is unique in this Project; therefore, only a very general qualitative comparison can be made to sweeping at temperate-weather conditions. The following is a comparison of McCoy I data with USNRDL data from Stoneman II:²¹

<u>Test</u>	<u>Surface</u>	<u>Sweeper type</u>	<u>Decontamination</u> %
Stoneman II	Asphaltic concrete	Mechanized	92
		Vacuum	99
McCoy I	Bare frozen ground	Mechanized	87
		Vacuum	92
	Packed snow	Mechanized	74
		Vacuum	67

It should be noted that contaminant particle size, relative effort, machines used, and mass deposit levels were somewhat different in the two operations. It can be seen, however, that under cold-weather environmental conditions, the effectiveness was less than that for dry pavement.

The basic recovery manual,²⁴ TM 3-225, presents an effectiveness of 93% motor-grading soil. Under ideal soil conditions, the effectiveness can rise to 97% as previously reported.²² When used for plowing snow in this operation, the effectiveness of motor grading was from 63% to 73%. Such plowing was observed to pack the snow as the blade passed over this compressible material. This could account for the lessened effectiveness. A more critical evaluation of the mold-board leading-edge angle to minimize this effect would appear to be in order for future work.

Fire hosing of the asphalt shingle roof would be expected to have a temperate-weather effectiveness of 96% to 98% based on earlier data.^{23,24} The test result of 83% is slightly lower but is, nevertheless, an effective figure for many situations. No freezing of water was noted on the roof; in fact, the runoff was free and the roof dried in a few hours of sunlight.

Radiation dosage was kept to a minimum by the experimenters and no residual dosage problems were encountered (see appendix E). Normal camp activities were resumed 30 days after the conclusion of the testing period.

IV. CONCLUSIONS.

The following evidence, based on the fragmentary information obtained during this test series, should be considered tentative and subject to change.

1. The possibly unique decontamination technique of water hosing packed snow and frozen soil is apparently without merit.
2. Mechanized sweeping and vacuum sweeping of packed snow and frozen soil are effective decontamination techniques.
3. The decontamination techniques of grading, sweeping, and hosing on applicable cold-weather surfaces are less effective than the same techniques on corresponding temperate-weather surfaces.

LITERATURE CITED

1. Laurino, R. K. Decontamination. Radiological Defense, Vol. 2. USNRDL AD-206(Y). February 1950. UNCLASSIFIED Report.
2. Levin, H. and Priest, H. Decontamination of Aircraft Contaminated in Flight by an Air Burst of an Atomic Bomb. USACWL TCIR-535. February 1950. CONFIDENTIAL-RESTRICTED Data.
3. Current Status of Countermeasures Against Radiological Contamination Resulting from an Atomic Detonation. Part I, USNRDL AD-326(Z). July 1951. UNCLASSIFIED Report.
4. Werner, L. B. and Sinnreich, S. R. Contamination-Decontamination Studies. Annex 6.7. Operation GREENHOUSE. WT-27. (1951). UNCLASSIFIED Report.
5. Earl, J. R., et al. Protection and Decontamination of Land Targets and Vehicles. Project 6.2. Operation JANGLE. WT-400. (1952). CONFIDENTIAL Report.
6. Vine, F. S., et al. Methods and Procedures for the Reclamation of Land Targets. USNRDL-407. March 1953. CONFIDENTIAL-RESTRICTED Report.
7. Morgenthau, M. and Shoss, M. L. Radiological Countermeasures. USACWL CRLR-268. August 1953. SECRET Report.
8. Morgenthau, M. and Shoss, M. L. Decontamination of Urban-Industrial Centers Following an RW Attack. USACWL CRLR-368. July 1954. SECRET Report.
9. A Guide to Radiological Warfare Countermeasures. USACWL CRLR-402. June 1954. FOR OFFICIAL USE ONLY Report.
10. A Study of the Waste Disposal Aspects of RW Decontamination. USACWL CRLR-437. June 1954. SECRET Report.
11. Laurino, R. K. The Effectiveness of Decontamination Methods Under Defined Conditions. USNRDL TR-30. November 1954. UNCLASSIFIED Report.
12. Maloney, J. C., et al. Decontamination and Protection. Project 6.5. Operation CASTLE. WT-928. (1955). CONFIDENTIAL Report.
13. Defense Against Residual Radiation from Nuclear Weapons. AFM 355-12. September 1957. CONFIDENTIAL Report.

LITERATURE CITED (CONTD.)

14. Miller, C. F. Estimated Effectiveness of Common Radiological Decontamination Methods for Paved Areas and Building Surfaces. USNRDL TR-140. March 1957. CONFIDENTIAL Report.
15. Trilling, C. Radiological Defense Requirements for Advanced Bases. USNRDL TR-189. November 1957. UNCLASSIFIED Report.
16. Sartor, J. D., et al. Cost and Effectiveness of Decontamination Procedures for Land Targets. USNRDL TR-196. December 1957. UNCLASSIFIED Report.
17. Molumphy, G. G. and Bigger, M. M. Proof Testing of Atomic Weapons Ship Countermeasures. Project 6.4. Operation CASTLE. WT-927. October 1957. CONFIDENTIAL Report.
18. Maloney, J. C. and Schmoke, M. A. Decontamination and Protection. Project 2.4. Operation REDWING. WT-1312. July 1959. CONFIDENTIAL Report.
19. Strobe, W. E. Evaluation of Countermeasure System Components and Operational Procedures. Project 32.3. Operation PLUMBBOB. WT-1464. September 1959. CONFIDENTIAL Report.
20. Gordon, M. G. and Smith, R. J. Classified Title. CRLR 571. April 1956. CONFIDENTIAL Report.
21. Lee, H., et al. Stoneman II Test of Reclamation Performance. Vol. 3, Performance Characteristics of Dry Decontamination Procedures. USNRDL TR-336. June 1959. UNCLASSIFIED Report.
22. Lee, H., et al. Stoneman II Test of Reclamation Performance. Vol. 4, Performance Characteristics of Land Reclamation Procedures. USNRDL TR-337. January 1959. UNCLASSIFIED Report.
23. Owen, W. L., et al. Stoneman II Test of Reclamation Performance. Vol. 2, Performance Characteristics of Wet Decontamination Procedures. USNRDL TR-335. July 1960. UNCLASSIFIED Report.
24. Radiological Recovery of Fixed Military Installations. TM 3-225. (NAVDOKS TP-PL-13). Int. rev. April 1958. UNCLASSIFIED Report.
25. Trilling, C. Analysis of Potential Delay in Radiological Recovery Due to Cold Weather in the United States. USNRDL TR-261. September 1958. UNCLASSIFIED Report.
26. Taylor, D., et al. Radiological Decontamination Methods and Equipment for Cold-Weather Regions. USNCEL TR-105. September 1961. UNCLASSIFIED Report.

APPENDICES

<u>Appendix</u>	<u>Page</u>
A. Cold-Weather Background Data.	20
B. Test-Site Criteria and Selection.	27
C. Simulant Production Facilities and Procedures	31
D. Experimental Data	51
E. Health-Physics Data	64

APPENDIX A

COLD-WEATHER BACKGROUND DATA

I. INTRODUCTION.

TM 3-225¹ presents methods and data necessary to perform decontamination operations on fixed military installations. As previously mentioned, these methods and data are based on contamination and decontamination under temperate weather conditions. Certain sections of this manual, such as radiological defense concepts, estimating processes, and methods of recovery planning, will not apply to cold weather operations. The application of basic recovery criteria will have to be modified, however, and in some cases alternate methods will have to be employed. A cold weather addendum to TM 3-225 would present the necessary technical information so that responsible personnel may estimate the recovery effort (in terms of personnel, materials, and equipment) and the over-all effectiveness of various recovery methods under cold-weather conditions.

II. PROBLEM AREAS.

A study has been conducted by this Laboratory of the phenomena associated with cold-weather conditions and their expected effect on decontamination recovery operations. As a result of this study, certain problem areas have been highlighted. The most significant of these, relating to the cold-weather recovery problem, are listed below. It is concluded that the information most urgently needed for a cold-weather addendum to the recovery manual will be met by pursuing a program that includes these problem areas.

A. Human Engineering.

Exposure of personnel to cold weather will necessitate the physiological adjustment of body functions. Use of heavy winter clothing and other essential, but uncomfortable items, may lower the nominal work output expected of a person.

The metabolic cost of performing various grades of work has been investigated by the U. S. Army Quartermaster Corps. Test results are based primarily on treadmill experiments. Figure A-1, taken from previous data,² shows the length of time that various grades of work can be continued by young healthy men. These data are group averages and great deviations can be expected for individual instances; however, they provide guidance for application to cold-weather work. It is reported that the metabolic cost, as shown in figure A-1, will be increased by 20% when wearing arctic clothing.

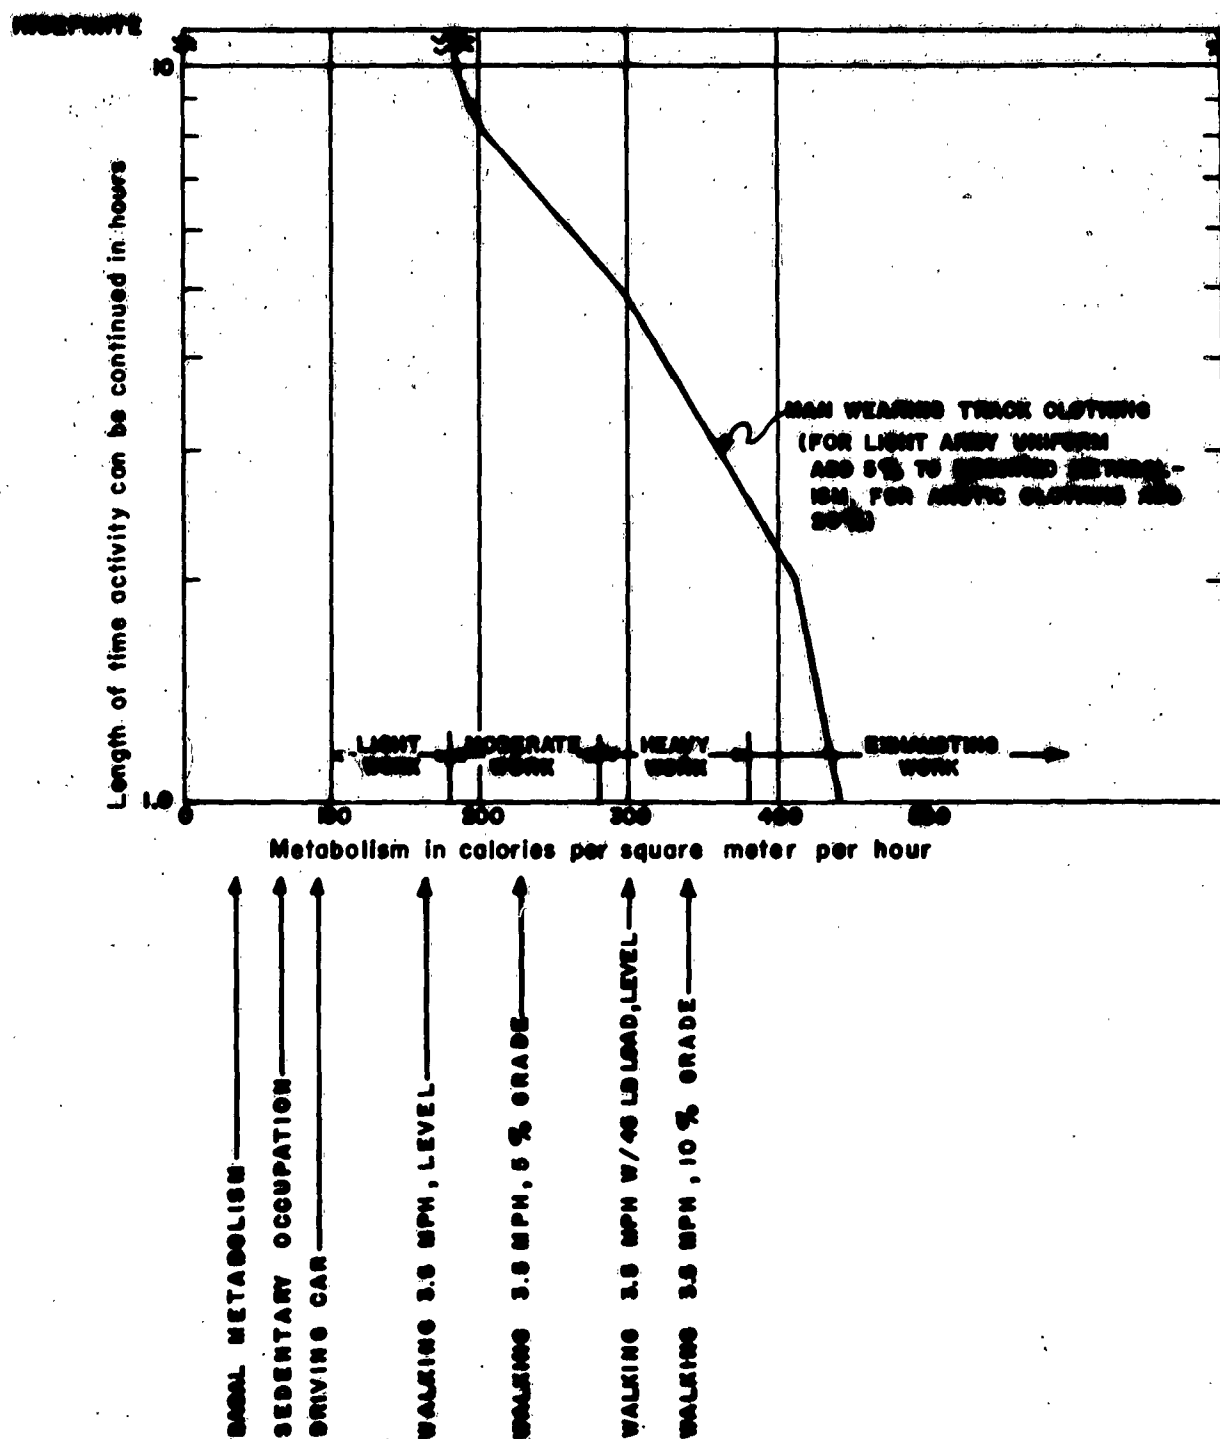


FIGURE A-1

ENDURANCE TIME FOR WORK OF AN ACTIVE MAN
20 TO 30 YEARS OF AGE IN GOOD PHYSICAL CONDITION

Dr. F. N. Craig, of the Physiology Division, USACRDL, has estimated that radiological recovery effort falls into the category of moderate work. Examination of figure A-1 shows that moderate work can be continued for a 4-hr shift even after allowing for the 20% metabolic increase caused by the wearing of arctic clothing.

Exposure of personnel to below-freezing environments can be a limiting factor in a recovery effort. Temperature, wind, and solar radiation are the prime factors affecting cold sensations. The effects of temperature and wind have been combined into the empirical windchill formula which has been correlated with comfort sensations at various levels of windchill.³ The effect of solar radiation is to decrease the windchill index value by about 200 kg cal/sq m/hr. Although windchill is based on the cooling of naked bodies, the comfort sensations of the clothed body follow the index fairly well, since the face area is always exposed.

Figure A-2 shows a plot of windchill values for various temperatures and wind speeds. The value of 1000 corresponds to a "very-cold" sensation. It is also described as "pleasant conditions for travel (in Antarctica) cease on foggy and overcast days." A value of 1400 is considered dangerous as "freezing of human flesh begins."³ Since travel in Antarctica is judged to be moderate work, the Windchill Index of 1000 (1200 on sunny days) is probably the upper practical limit for decontamination work. At -10°F, the corresponding wind speed for this condition is only 2 mph; however, this is mitigated by the fact that "lowest temperatures in any locality always occur with calms or very light winds."⁴ In any instance, operations inside closed cabs of vehicles would be feasible at -10°F and operations in the open highly probable, provided that the proper type of clothing is worn.

B. Equipment Engineering.

With proper procedures, most engineering-type equipment, both military and civilian, can be operated in cold weather. The work output of this type of equipment will be adversely affected, however, by various cold weather extremes; i.e., deep snow, frozen ground, thawing ground.

There is little problem in the operation, per se, of earthmoving and engineer equipment in cold environments. Obvious precautions, such as the use of proper grades of lubricants and operation of pumps and hose lines to prevent freezing, must be followed. There are reductions in efficiency, however, in the output of some machinery that are dependent upon such factors as depth of frozen ground for earthmoving equipment, the presence of liquid water on surfaces at temperatures near the thawing point that would make dry sweeping inefficient, and the decrease of operator dexterity when wearing winter clothing. These limitations apply to any construction-type work under cold-weather conditions.

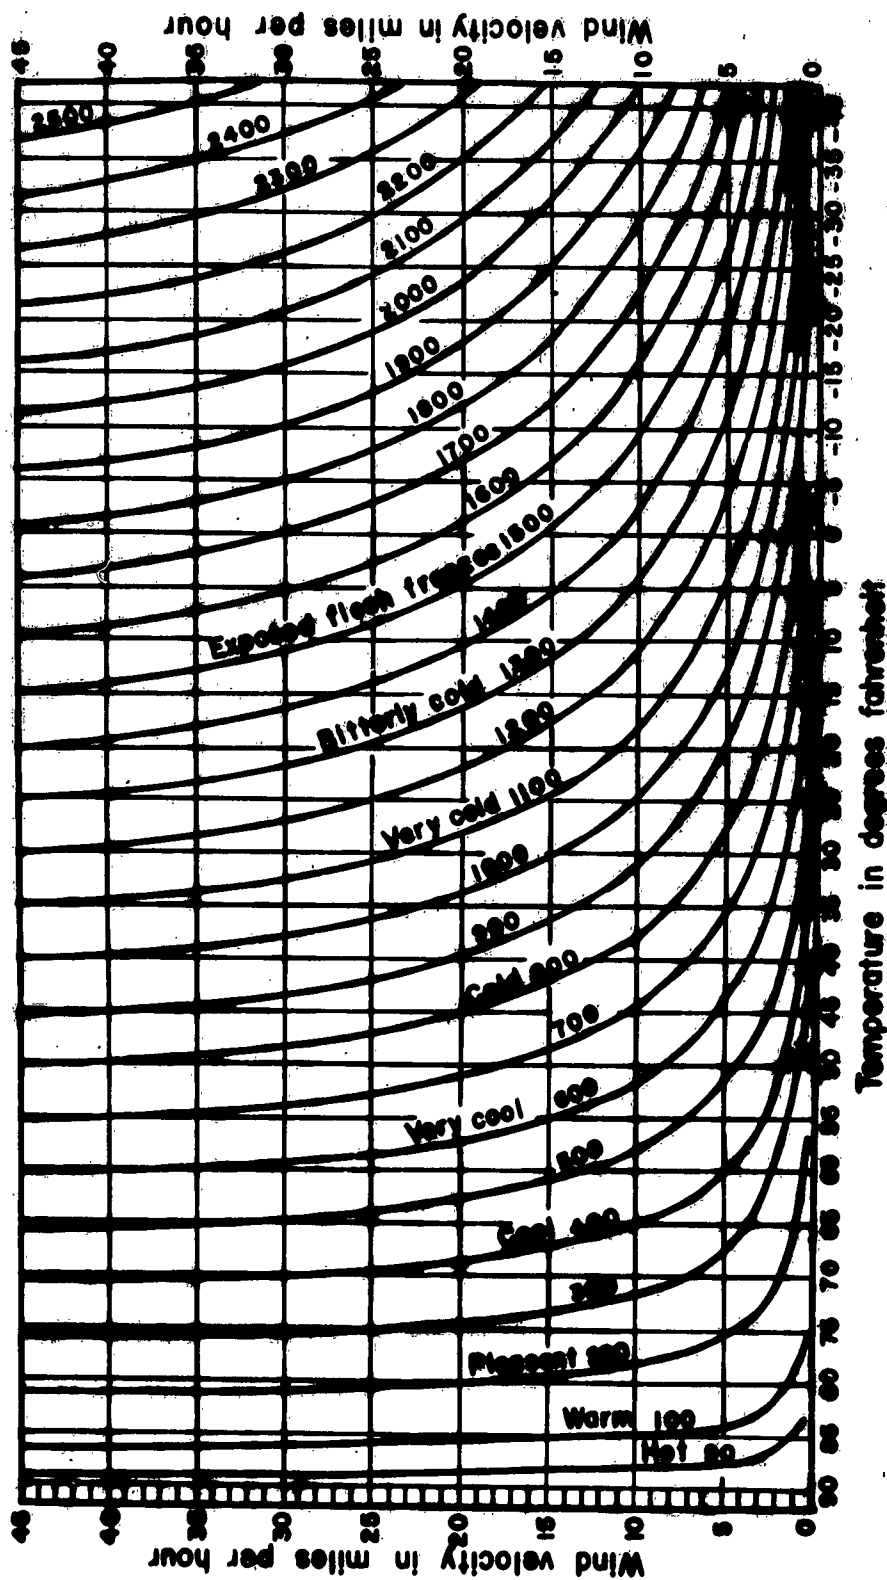


FIGURE A-2
WINDCHILL INDEX

The contamination of engineer equipment during operations in a contaminated area has not proved to be a military problem under temperate conditions. Wet snow will pack on the track, suspension, idler wheels, and sprockets of tracked vehicles. This requires occasional halts to remove the accumulation.⁵

The Naval Civil Engineering Laboratory (NCEL) is currently investigating the decontamination of vehicles under freezing conditions. Cold-chamber facilities at Port Heuneme, California, are being utilized. A newly developed non-leaching fluorescent simulant is used as the contaminant, and field expedient decontamination measures are featured.

C. Water Flow.

The possibility exists that runoff water from hosing operations may freeze, thus concentrating the contamination contained in this water. The parameters affecting the freezing of this runoff water for various temperatures and types of terrain are undefined.

The behavior of runoff water from fire hoses used in decontamination operations, down to temperatures as low as -10°F , is a major problem. It was observed during the recent Fort Greely and Point Barrow, Alaska, tests that at 32°F runoff water ran freely down slight slopes. Under the worst drainage condition, where the runoff was on ocean ice, visible crusting was noted 15 min after stagnation at an air temperature of 7°F and a Windchill Index of 1200. Most fixed installations have well-drained surfaces, at least around buildings, so that runoff water should reach a drain within a few minutes; however, the factors that control the freezing of running water are not well defined. Variables include initial water temperature, water film thickness, air temperature and windspeed (windchill), surface temperature, slope, and solar radiation.

The NCEL is also conducting studies in their cold chamber on the freezing time of water film at various cold environmental conditions. Although the experimental effort is directed toward the requirements of building washdown systems, the data should be applicable to the runoff of hose streams.

D. Fallout Migration on Snow.

Any migration of fallout on snow, either horizontal or vertical, will have a pronounced effect on the decontamination procedure to be used.

The vertical movement of deposited solid fallout into the ground is negligible under temperate conditions, and a similar circumstance would be encountered when the ground is frozen; however, the fallout may settle through snow and ice by a combination of gravity

and thermal action. Since the location of the fallout, with respect to snow or ice surfaces, will determine the decontamination procedure to be followed, it is necessary to understand the phenomena associated with fallout migration.

The NCEL has reported that sand deposited on snow migrated a maximum vertical distance of 1-1/2 in. until solar radiation no longer had an effect. Little else is known of this phenomenon.

The movement of contaminant by wind under drifting snow conditions may materially alter the initial fallout pattern, as contrasted to the situation where the snow is crusted. The formation of "hot spots" on the leeward sides of buildings, embankments, etc., may be expected. This effect and possible decontamination implications have not been studied.

E. Dose Factors.

The effect of snow cover on dose rates in the instance of snow fall subsequent to the arrival of contamination must be considered. The dose rate for loads of contaminated snow, important in snow removal procedures, is not defined.

The operators of equipment, such as mechanized scrapers, loaders, and dump trucks, should receive a greater dose from a contaminated load of snow than from a contaminated load of soil. This is due to the lower bulk shielding characteristics of snow as compared to that of soil.

The magnitude of this increased dose has possible significance. In addition, there is the possibility of shielding afforded by snowfall subsequent to a contaminating event.

F. Decontamination Effectiveness and Techniques.

The residual numbers for temperate decontamination operations will require modification for certain cold-weather conditions. Modification or substitution of certain techniques, such as hosing, sweeping, and scraping, will be necessary during cold-weather decontamination operations.

Only limited experimental data have been published on the decontamination effectiveness of any method at low temperatures. The Gordon and Smith report⁶ contains some data on the decontamination of tar paper and galvanized iron at 0°F using 8- and 40-psi water hosing. The contaminant was not representative of fallout, but was particulate in nature. For the fire-hosing pressure at 40 psi, there was little difference in over-all effectiveness on originally dry surfaces at 0° and 70°F; however, the effort required increased by as much as a factor of 2 when ice or snow was present on the surfaces initially. At the lower hosing pressure of 8 psi, the effectiveness on tar paper noticeably decreased at the cold condition.

LITERATURE CITED

1. Radiological Recovery of Fixed Military Installations. TM 3-225. (NAVDOKS TP-PL-13). Int. rev. April 1958.
2. Newburgh, L. H. Physiology of Heat Regulation and the Science of Clothing. W. B. Saunders Co., Philadelphia, Pa. (1949).
3. Siple, P. A. and Passel, C. F. Measurements of Dry Atmospheric Cooling in Subfreezing Temperatures. Proc. Am. Philosophical Soc. 89, No. 1. April 1945.
4. Court, A. Wind Chill. Bull. Am. Meteorol. Soc. 29, No. 10. December 1948.
5. Northern Operations. FM 31-71. January 1959.
6. Gordon, M. G. and Smith, R. J. Classified title. CRIR 571. April 1956.

APPENDIX B

TEST-SITE CRITERIA AND SELECTION

I. TEST-SITE CRITERIA.

To meet the objectives of the Project 4X12-01-001-02, the following criteria, in the order of their importance, were deemed necessary:

1. January mean temperature (from 0° to 10°F) and 1-ft snow cover.
2. Approval to use isotopes and restricted test and operating areas for suitable periods.
3. A test area isolated by a distance of at least 1 mile from inhabited areas, but including paved streets, buildings, electricity, and a water-supply system with fire hydrants.
4. An operations area, including a heated building or buildings for simulant production and a change house.
5. Available logistic support in the form of engineer equipment, maintenance facilities, and shops.
6. Operating motor pool.
7. Housing for test participants.
8. Emergency procurement office.

II. TEST-SITE SELECTION AND DESCRIPTION.

A survey of military installations which could best meet the above criteria, disclosed that Camp McCoy, Wisconsin, was the logical choice. This camp met all requirements except the first; the January mean temperature is 5°F higher than the desired 10°F. It should be noted, however, that the January mean temperature does not go below 10°F at any location in the continental United States where military camps are located. Accordingly, arrangements were made through Headquarters, Fifth U. S. Army for the use of Camp McCoy as the test site.

This camp, originally designed to accommodate a World War II triangular division, is now utilized as the summer training area for Army Reserve and National Guard units in the Fifth U. S. Army. Logistic facilities are on hand for such training, and are available for use

during the remaining period of the year when the camp reverts to inactive status. A map of the camp's cantonment area is presented in figure B-1. It should be noted that during the winter, practically all camp functions are restricted to the area adjacent to or south of Tarr Creek, leaving vast areas in the northern part of the camp available for radiological test work.

Figure B-2 is a map showing blocks 1 through 6 of Camp McCoy that were selected as the operations and test areas.

Building 37 was selected as the location of the fallout simulant processing facility. It has a floor area of 40 by 120 ft with an 18-ft high ceiling and double overhead garage doors at each end. In processing the fallout simulant, the raw materials were unloaded in one end of the building, and proceeded in a line from the hot cell, through the various operations, to a bin at the other end.

A change house was established in building 30, a nearby barracks. All cold-weather apparel and protective clothing were kept in this building when not in use. The usual monitoring, showering, and hot and cold locker arrangements were employed. On the second floor of this building was a storage room and a field office.

Laboratory space was provided by the radiochemical trailer, Radiac Set, AN/NDQ-1, parked inside building 47, a vehicle maintenance building. A counting room was located in a small room of this building, and the remainder of the floor area, 30 by 30 ft, was utilized for sand storage, sifting, grading, and bagging operations.

Building 45 was used for storage of hot vehicles when not in use and as a field-area personnel shelter. The only other structure occupied by the project was building 33, an orderly room utilized as an illuminated ambient-temperature instrument calibration range. The roof of building 50 and the parking lots and land areas in blocks 5 and 6 were used as test surfaces.

Final disposal of waste, 1 mo after operations, was made by burial in a pit in the buffer zone to the camp's remote North Impact Area.

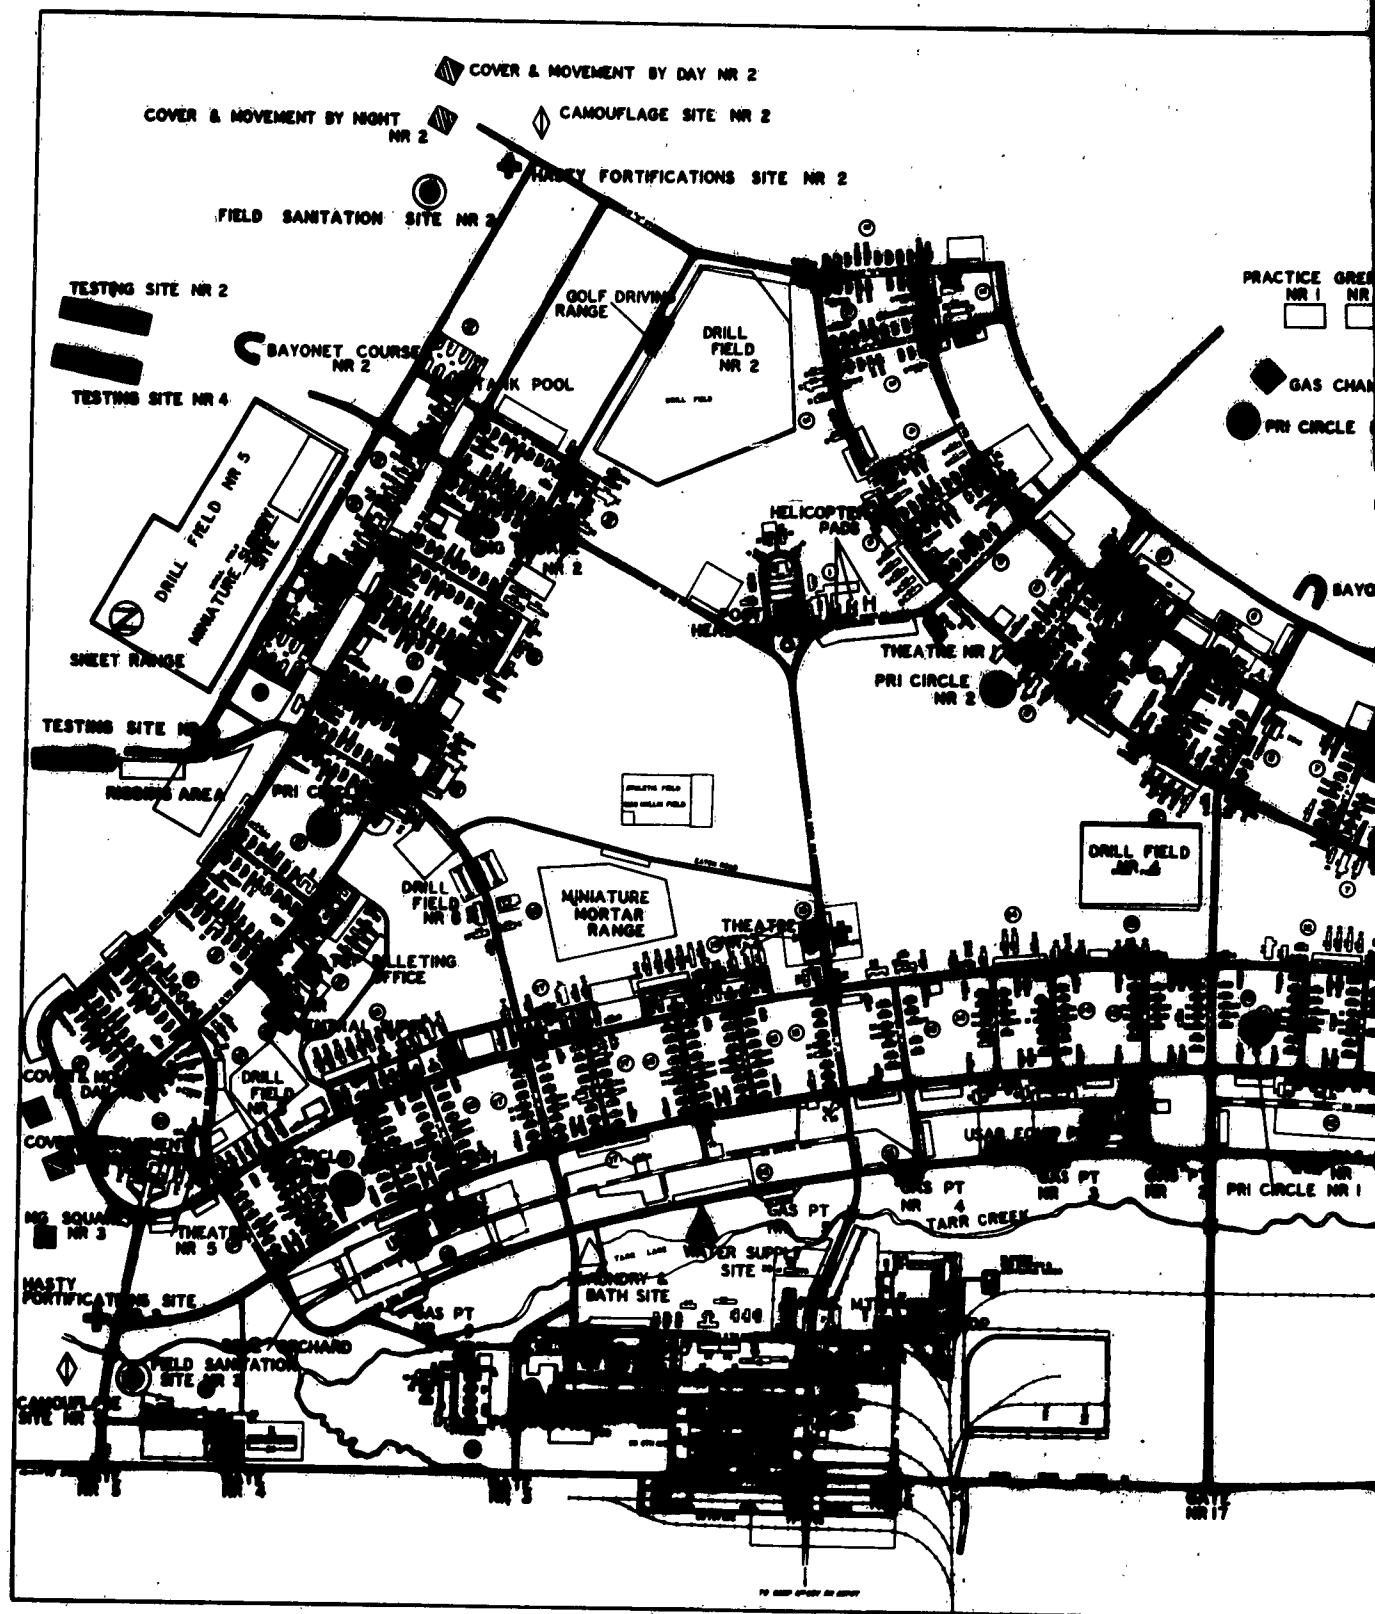


FIGURE B-1

CANTONMENT AND CLOSE IN FACILITIES


CONTAMINATIONS SITE NR 2

CONCLUSIONS

U.S. DEPARTMENT OF JUSTICE

- | | | | |
|----|--------------------------|-----|-----------------------------|
| N | OFFICE'S MARTENS | S | CHAPEL |
| N | MESS HALL | S | CHURCH GLASS |
| N | UNIT ADMINISTRATION | P | POST OFFICE |
| Y | THEATER | F | FILE HOUSE |
| CH | GUEST HOUSE | S | SUPERMARKET |
| S | OVERNIGHTS | R | RECREATION BUILDING |
| S | POST EXCHANGE | PD | PRINCIPAL BUILDING |
| GS | AND WATER PUMP HOUSE | GP | GENERAL PURPOSES |
| NR | UNIT GUEST HOUSE | TC | TELEPHONE EXCHANGE |
| PL | FLM LIBRARY | VE | VEHICLE EXCHANGE |
| GS | SIGNAL CONTROL | CC | OFFICE'S CLAB |
| SP | SERIAL SERVICE | RC | RED CROSS |
| OC | DENTAL CLINIC | REH | REHAB |
| | BUILDINGS SHOWN THRU ARE | S | SEWER SEWER OR SERVICE SHOP |
| | ON ENTRANCE WALKER | | CLUBS 1ST |
| | OTHERWISE INDICATED | | CLUB 2ND |
| | | | CLUB 3RD |
| | | | CLUB 4TH |
| | | | CLUB 5TH |
| | | | CLUB 6TH |
| | | | CLUB 7TH |
| | | | CLUB 8TH |
| | | | CLUB 9TH |
| | | | CLUB 10TH |
| | | | CLUB 11TH |
| | | | CLUB 12TH |
| | | | CLUB 13TH |
| | | | CLUB 14TH |
| | | | CLUB 15TH |
| | | | CLUB 16TH |
| | | | CLUB 17TH |
| | | | CLUB 18TH |
| | | | CLUB 19TH |
| | | | CLUB 20TH |
| | | | CLUB 21TH |
| | | | CLUB 22TH |
| | | | CLUB 23TH |
| | | | CLUB 24TH |
| | | | CLUB 25TH |
| | | | CLUB 26TH |
| | | | CLUB 27TH |
| | | | CLUB 28TH |
| | | | CLUB 29TH |
| | | | CLUB 30TH |
| | | | CLUB 31TH |
| | | | CLUB 32TH |
| | | | CLUB 33TH |
| | | | CLUB 34TH |
| | | | CLUB 35TH |
| | | | CLUB 36TH |
| | | | CLUB 37TH |
| | | | CLUB 38TH |
| | | | CLUB 39TH |
| | | | CLUB 40TH |
| | | | CLUB 41TH |
| | | | CLUB 42TH |
| | | | CLUB 43TH |
| | | | CLUB 44TH |
| | | | CLUB 45TH |
| | | | CLUB 46TH |
| | | | CLUB 47TH |
| | | | CLUB 48TH |
| | | | CLUB 49TH |
| | | | CLUB 50TH |
| | | | CLUB 51TH |
| | | | CLUB 52TH |
| | | | CLUB 53TH |
| | | | CLUB 54TH |
| | | | CLUB 55TH |
| | | | CLUB 56TH |
| | | | CLUB 57TH |
| | | | CLUB 58TH |
| | | | CLUB 59TH |
| | | | CLUB 60TH |
| | | | CLUB 61TH |
| | | | CLUB 62TH |
| | | | CLUB 63TH |
| | | | CLUB 64TH |
| | | | CLUB 65TH |
| | | | CLUB 66TH |
| | | | CLUB 67TH |
| | | | CLUB 68TH |
| | | | CLUB 69TH |
| | | | CLUB 70TH |
| | | | CLUB 71TH |
| | | | CLUB 72TH |
| | | | CLUB 73TH |
| | | | CLUB 74TH |
| | | | CLUB 75TH |
| | | | CLUB 76TH |
| | | | CLUB 77TH |
| | | | CLUB 78TH |
| | | | CLUB 79TH |
| | | | CLUB 80TH |
| | | | CLUB 81TH |
| | | | CLUB 82TH |
| | | | CLUB 83TH |
| | | | CLUB 84TH |
| | | | CLUB 85TH |
| | | | CLUB 86TH |
| | | | CLUB 87TH |
| | | | CLUB 88TH |
| | | | CLUB 89TH |
| | | | CLUB 90TH |
| | | | CLUB 91TH |
| | | | CLUB 92TH |
| | | | CLUB 93TH |
| | | | CLUB 94TH |
| | | | CLUB 95TH |
| | | | CLUB 96TH |
| | | | CLUB 97TH |
| | | | CLUB 98TH |
| | | | CLUB 99TH |
| | | | CLUB 100TH |

SCALE IN FEET

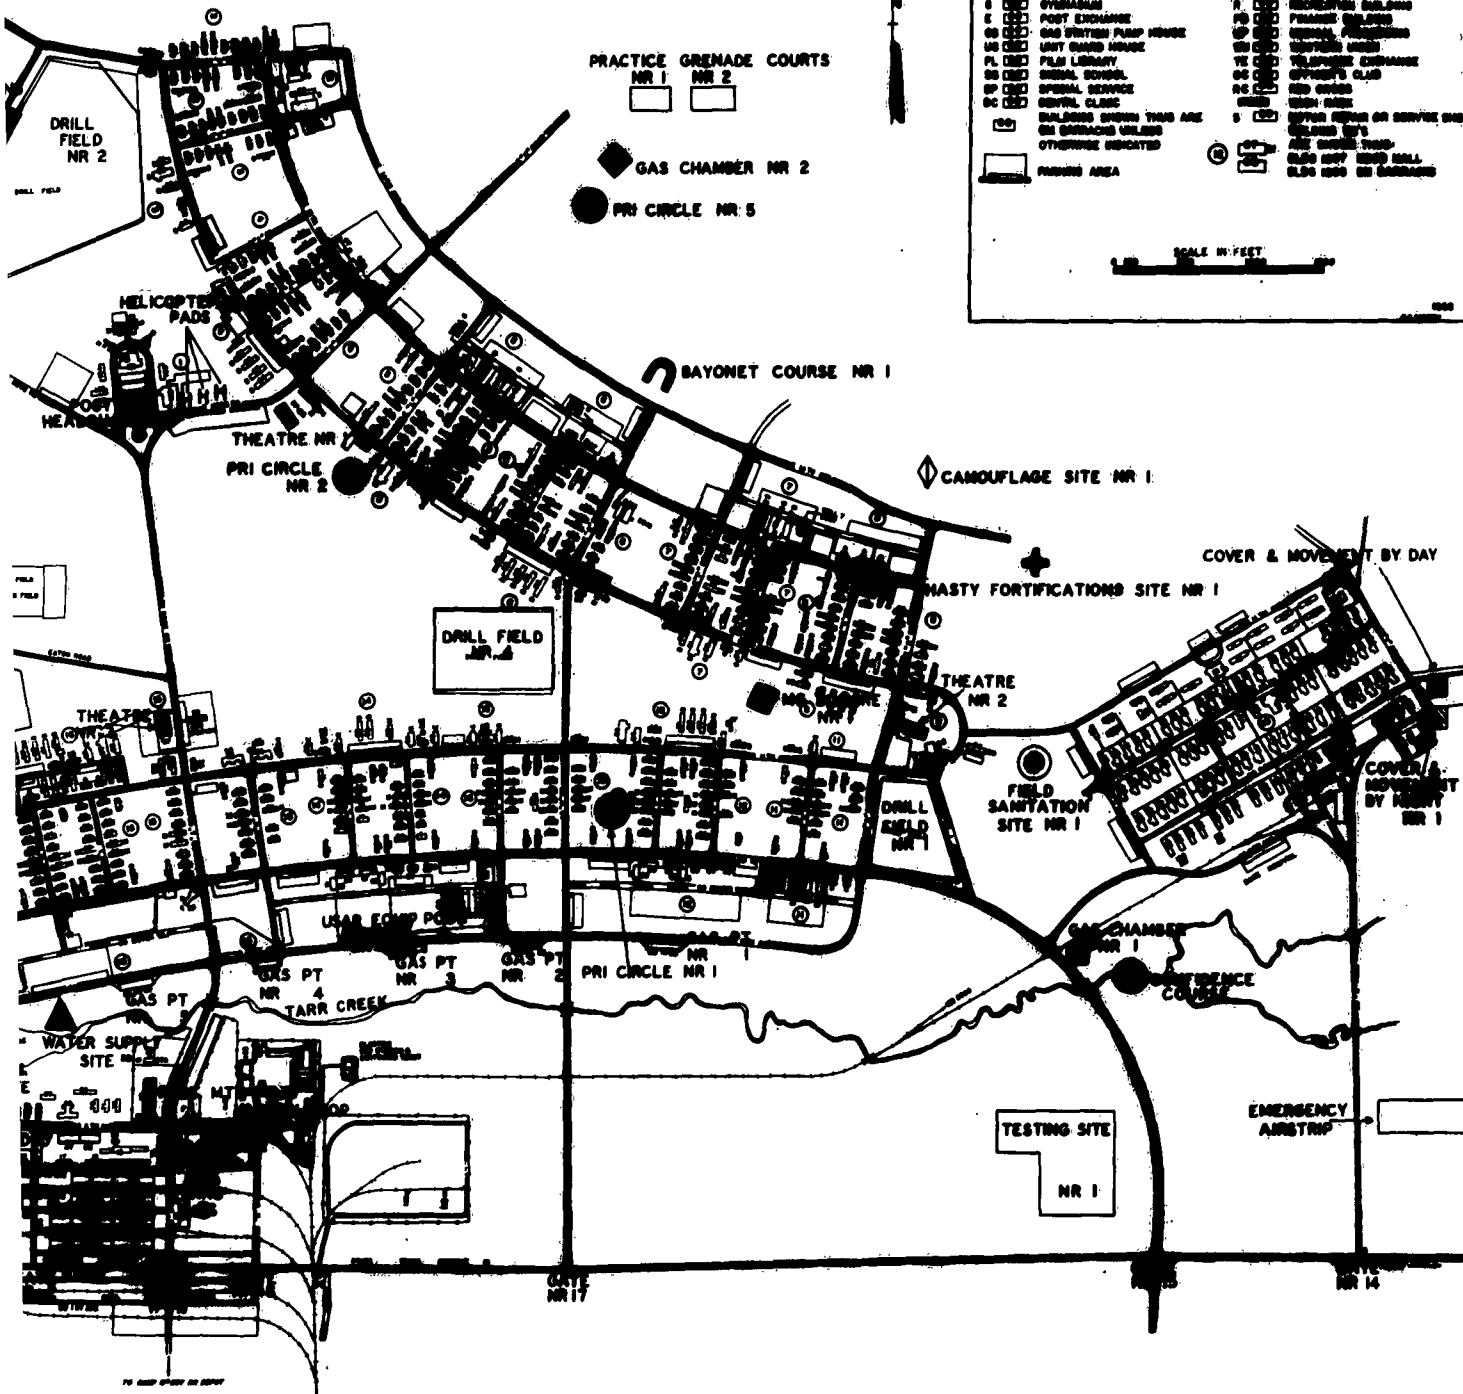

LITIES

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	1011	1012	1013	1014	1015	1016	1017	1018	1019	1020	1021	1022	1023	1024	1025	1026	1027	1028	1029	1030	1031	1032	1033	1034	1035	1036	1037	1038	1039	1040	1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	1051	1052	1053	1054	1055	1056	1057	1058	1059	1060	1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	1071	1072	1073	1074	1075	1076	1077	1078	1079	1080	1081	1082	1083	1084	1085	1086	1087	1088	1089	1090	1091	1092	1093	1094	1095	1096	1097	1098	1099	1100	1101	1102	1103	1104	1105	1106	1107	1108	1109	1110	1111	1112	1113	1114	1115	1116	1117	1118	1119	1120	1121	1122	1123	1124	1125	1126	1127	1128	1129	1130	1131	1132	1133	1134	1135	1136	1137	1138	1139	1140	1141	1142	1143	1144	1145	1146	1147	1148	1149	1150	1151	1152	1153	1154	1155	1156	1157	1158	1159	1160	1161	1162	1163	1164	1165	1166	1167	1168	1169	1170	1171	1172	1173	1174	1175	1176	1177	1178	1179	1180	1181	1182	1183	1184	1185	1186	1187	1188	1189	1190	1191	1192	1193	1194	1195	1196	1197	1198	1199	1200	1201	1202	1203	1204	1205	1206	1207	1208	1209	1210	1211	1212	1213	1214	1215	1216	1217	1218	1219	1220	1221	1222	1223	1224	1225	1226	1227	1228	1229	1230	1231	1232	1233	1234	1235	1236	1237	1238	1239	1240	1241	1242	1243	1244	1245	1246	1247	1248	1249	1250	1251	1252	1253	1254	1255	1256	1257	1258	1259	1260	1261	1262	1263	1264	1265	1266	1267	1268	1269	1270	1271	1272	1273	1274	1275	1276	1277	1278	1279	1280	1281	1282	1283	1284	1285	1286	1287	1288	1289	1290	1291	1292	1293	1294	1295	1296	1297	1298	1299	1300	1301	1302	1303	1304	1305	1306	1307	1308	1309	1310	1311	1312	1313	1314	1315	1316	1317	1318	1319	1320	1321	1322	1323	1324	1325	1326	1327	1328	1329	1330	1331	1332	1333	1334	1335	1336	1337	1338	1339	1340	1341	1342	1343	1344	1345	1346	1347	1348	1349	1350	1351	1352	1353	1354	1355	1356	1357	1358	1359	1360	1361	1362	1363	1364	1365	1366	1367	1368	1369	1370	1371	1372	1373	1374	1375	1376	1377	1378	1379	1380	1381	1382	1383	1384	1385	1386	1387	1388	1389	1390	1391	1392	1393	1394	1395	1396	1397	1398	1399	1400	1401	1402	1403	1404	1405	1406	1407	1408	1409	1410	1411	1412	1413	1414	1415	1416	1417	1418	1419	1420	1421	1422	1423	1424	1425	1426	1427	1428	1429	1430	1431	1432	1433	1434	1435	1436	1437	1438	1439	1440	1441	1442	1443	1444	1445	1446	1447	1448	1449	1450	1451	1452	1453	1454	1455	1456	1457	1458	1459	1460	1461	1462	1463	1464	1465	1466	1467	1468	1469	1470	1471	1472	1473	1474	1475	1476	1477	1478	1479	1480	1481	1482	1483	1484	1485	1486	1487	1488	1489	1490	1491	1492	1493	1494	1495	14
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	----

APPENDIX C

SIMULANT PRODUCTION FACILITIES AND PROCEDURES

I. PROCESSING.

Figure C-1 presents the flow diagram of the production process and figure C-2 presents the floor plan of building 37, the principal production area. The following is a description of the various steps necessary in the production of the radioactive simulant:

A. Sand Processing.

Portage 515 Silica Sand was delivered to building 47 by the supplier in a tank truck. The supplier's chemical and physical analyses of this sand are tabulated in the table, appendix C. The appearance of the sand is clean, white, rounded particles. The sand was sieved on a Novo, model SS-8, sieving machine (see figure C-3), in order to separate the 150 μ to 300 μ size fraction. The sieved sand was bagged in 50-lb sacks and transported by fork lift to building 37.

B. Isotope Processing.

Quartz capsules containing 2 gm of La_2O_3 were irradiated as required in the CP-5 nuclear reactor at Argonne National Laboratory (ANL), Lemont, Illinois. Irradiations were performed in a thermal neutron flux of 5×10^{13} N/sq cm/sec in order to produce specific activities in the range of 7 to 13 curies/gm. The capsules were loaded by ANL personnel into a shielding container with 7-in.-thick lead walls, weighing 1850 lb. This was transported by truck to Camp McCoy, Wisconsin, a distance of 275 miles, which required 8 hr of driving time. Upon arrival at Camp McCoy, the truck backed through the west access door of Building 37 where the shield was unloaded by a fork lift. It was then picked up by an overhead monorail trolley hoist and transported into the hot cell.

The hot cell was a room 8 ft wide, 12 ft long, and 10 ft high surrounded by concrete walls approximately 2 ft thick. The walls were made of three rows of solid concrete blocks 4 by 8 by 16 in. laid without mortar. They were so stacked that the cracks between blocks were out of alignment. This provided a minimum shielding thickness of 16 in. of concrete. The walls were coated with two coats of whitewash. Special attention was given to thoroughly brushing the whitewash into all cracks. The ceiling of the hot cell was sheet rock with all corners and joints taped and spackled. The double access doors and double monorail-closure doors were tight fitting with sponge rubber seals. Figure C-4 shows some stages of the cell construction.

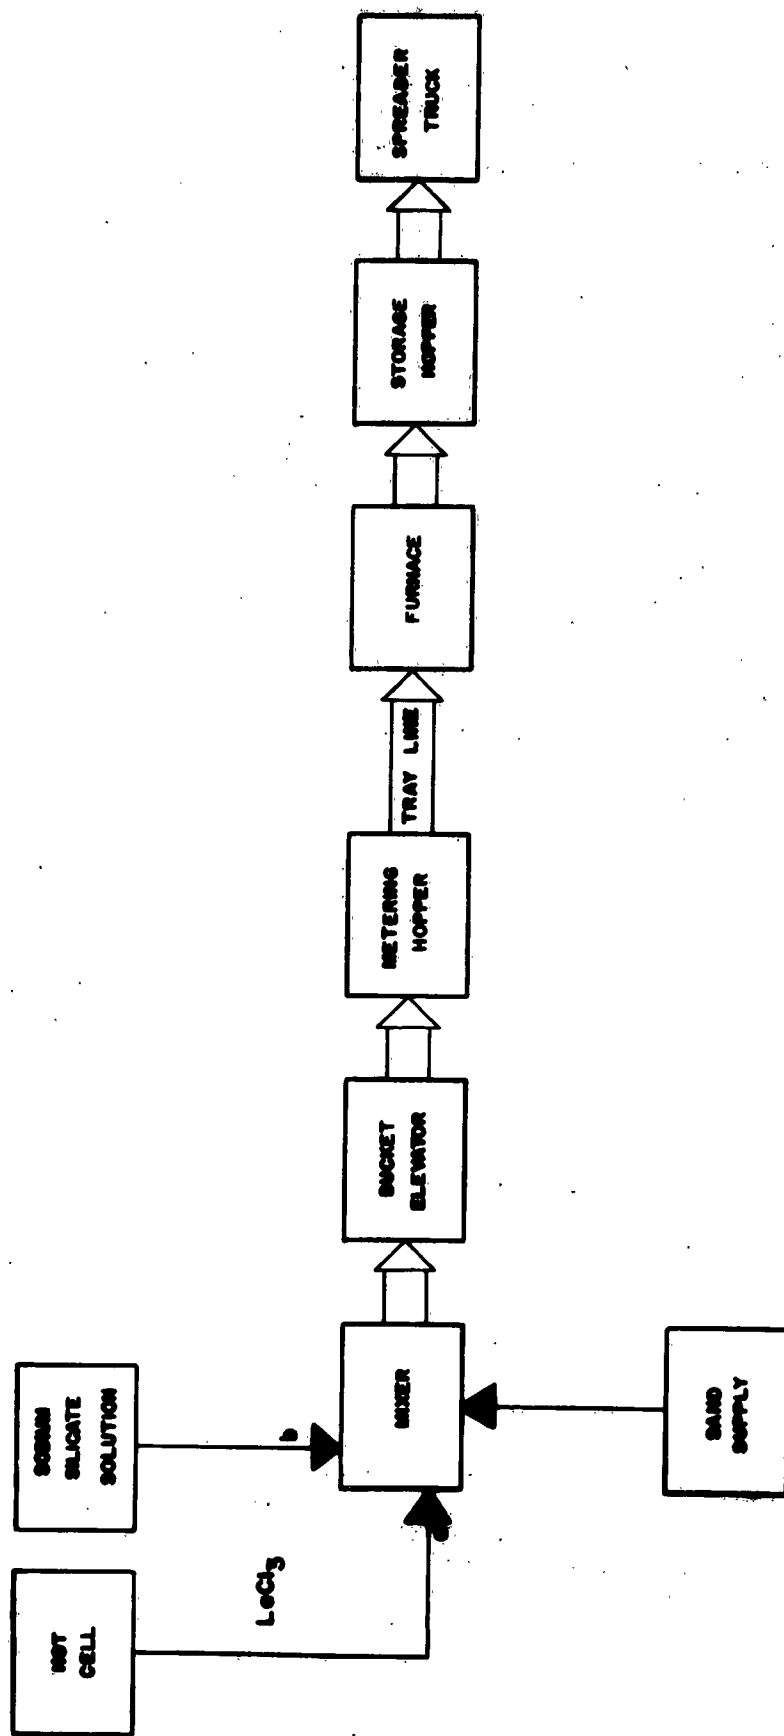


FIGURE C-1
SIMULANT PRODUCTION FLOW DIAGRAM

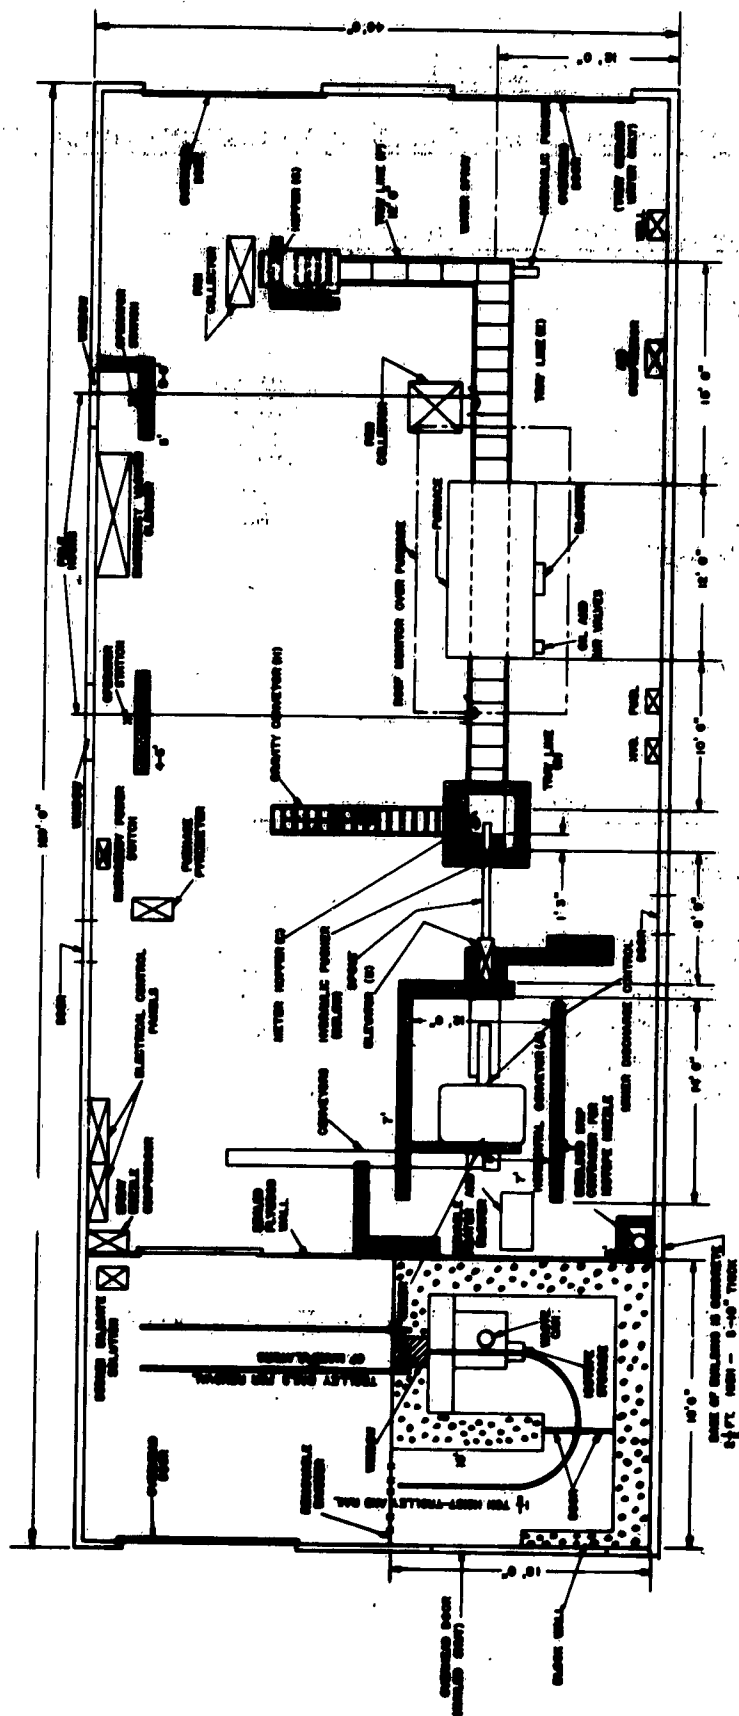


FIGURE C-2
FALLOUT SIMULANT PRODUCTION FACILITY

TABLE C-1

PORTAGE DRIED AND SCREENED 515 SILICA SAND CHARACTERISTICS *

Percentage of Total Sand Retained by Sieves

Sieve size	%
On 40	1.6
On 50	14.7
On 70	31.7
On 100	31.4
On 140	15.1
On 200	4.4
On 270 & pan	0.9

Representative Chemical Analysis

Silica	99.58%
Iron oxide	0.021% - 0.026%
Aluminum oxide	0.20%
Titanium oxide	0.011%
Calcium oxide	0.01%
Magnesium oxide	Trace
Loss on ignition	0.17%
Fusion point	3,050°F

* Supplied by Carpenter Brothers, Inc., Milwaukee, Wisconsin.

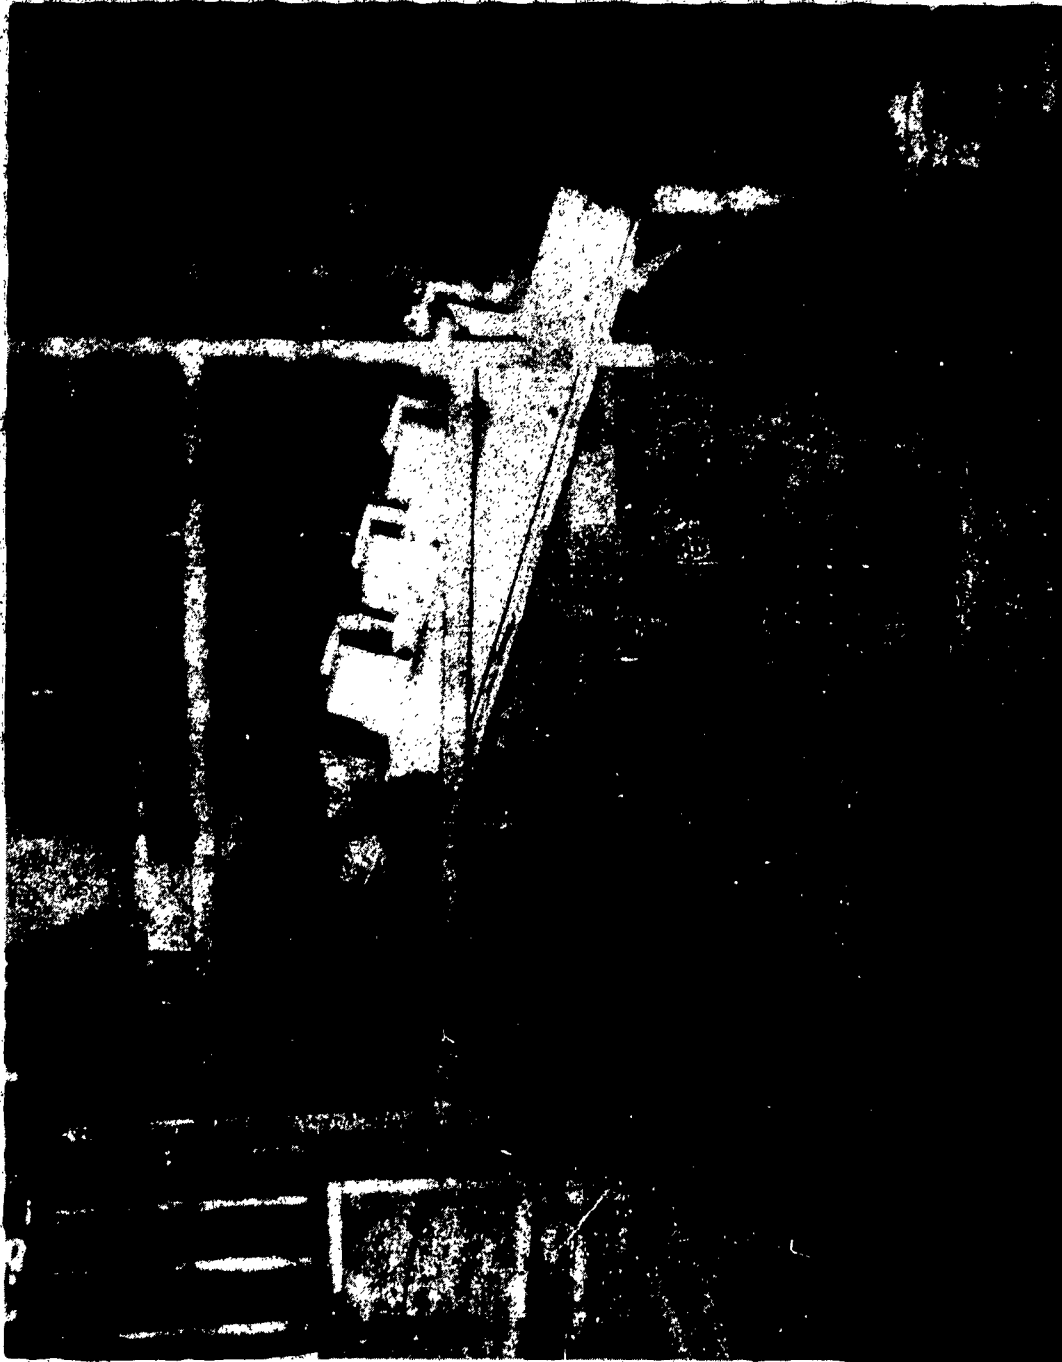


FIGURE C-3
SLEWING MACHINE INSTALLATION

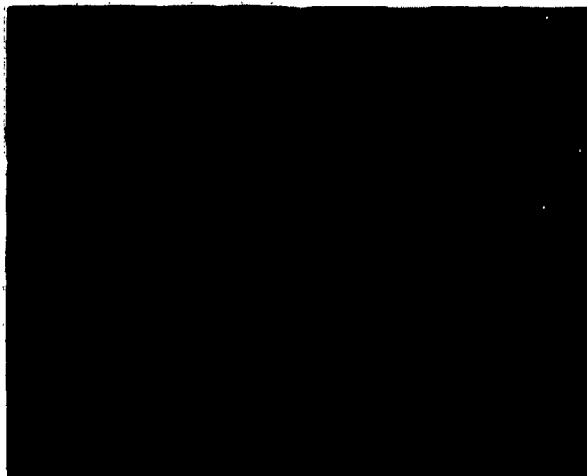


FIGURE C-4
STAGES OF HOT-CELL CONSTRUCTION

A viewing window, 2 by 2 by 2 ft., was placed in the front wall and filled with optical-grade zinc bromide. Also installed on the front wall was a pair of model 8 master-slave manipulators. Figure C-5 shows the operator using manipulators to prepare materials for a production run. To the left of the viewing window was an access tube of 2-in. pipe used for sampling; when not in use, the end was capped with a 4-in.-long lead plug.

A 9-in. monorail beam was mounted inside the hot cell and was equipped with a 2-ton trolley chain hoist. A 30-in. platform was provided in the cell on which to place the lead shield.

Two stainless steel trays covered the tables on which the chemical work was performed. One tray was 2 by 8 ft and had a 1-in. lip. This tray was used for storage of mirrors and cold chemicals. It was placed directly in front of the hot-cell window and was supported by sawhorses. The other tray was a square hot-work table with 4-ft. sides and a 2-in. lip. It was supported by a plywood box filled with sand that was used to shield a dry wastebasket located below a hole in the center of the tray.

The cell was equipped with electrical outlets and vacuum and pressure lines. Each vacuum line was equipped with a trap to prevent pulling radioactive material from the cell. A hot plate was located on the work table to heat the lanthanum solution. A mechanical device used to fracture the quartz vials was located on the storage tray. The glassware used in dissolving the samples consisted of a 400-ml beaker, a 250-ml volumetric flask, a 250-ml graduated cylinder, a filter tube with 30-mm diameter gritted filter, and a 1-liter jug with a manifold and necessary stopcocks to permit evacuation, pressurization, or flushing of the jug. A Tygon tube was connected to the discharge tube of the jug to permit transfer of the solution to the mixer. The interior of the hot cell is shown in figure C-6.

An exhaust fan, capable of moving air at the rate of 500 cfm against a pressure differential of 0.5-in. water, was connected to the hot cell by the way of duct work and a filter system to an exhaust stack outside the building housing the simulant production facility. The filter system for the hot cell consisted of four coarse filters in series and two fine filters in parallel. The coarse filters were furnace-type. They were 25 by 25 by 2 in. and were capable of handling 1,000 cfm at a pressure differential of 1-in. water. The fine filters, CWS absolute type, manufactured by the Cambridge Filter Corporation of Syracuse, New York, provided an airflow cross section measuring 24 by 48 by 11.5 in.

In the hot-cell operations, the monorail hoist hook was engaged to the shield cover and all personnel withdrew from the hot-cell interior. The warning devices were activated to set an alarm when any



FIGURE C-5
USING MASTER-SLAVE MANIPULATORS
DURING PREPARATION OF LaCl_3 SOLUTION

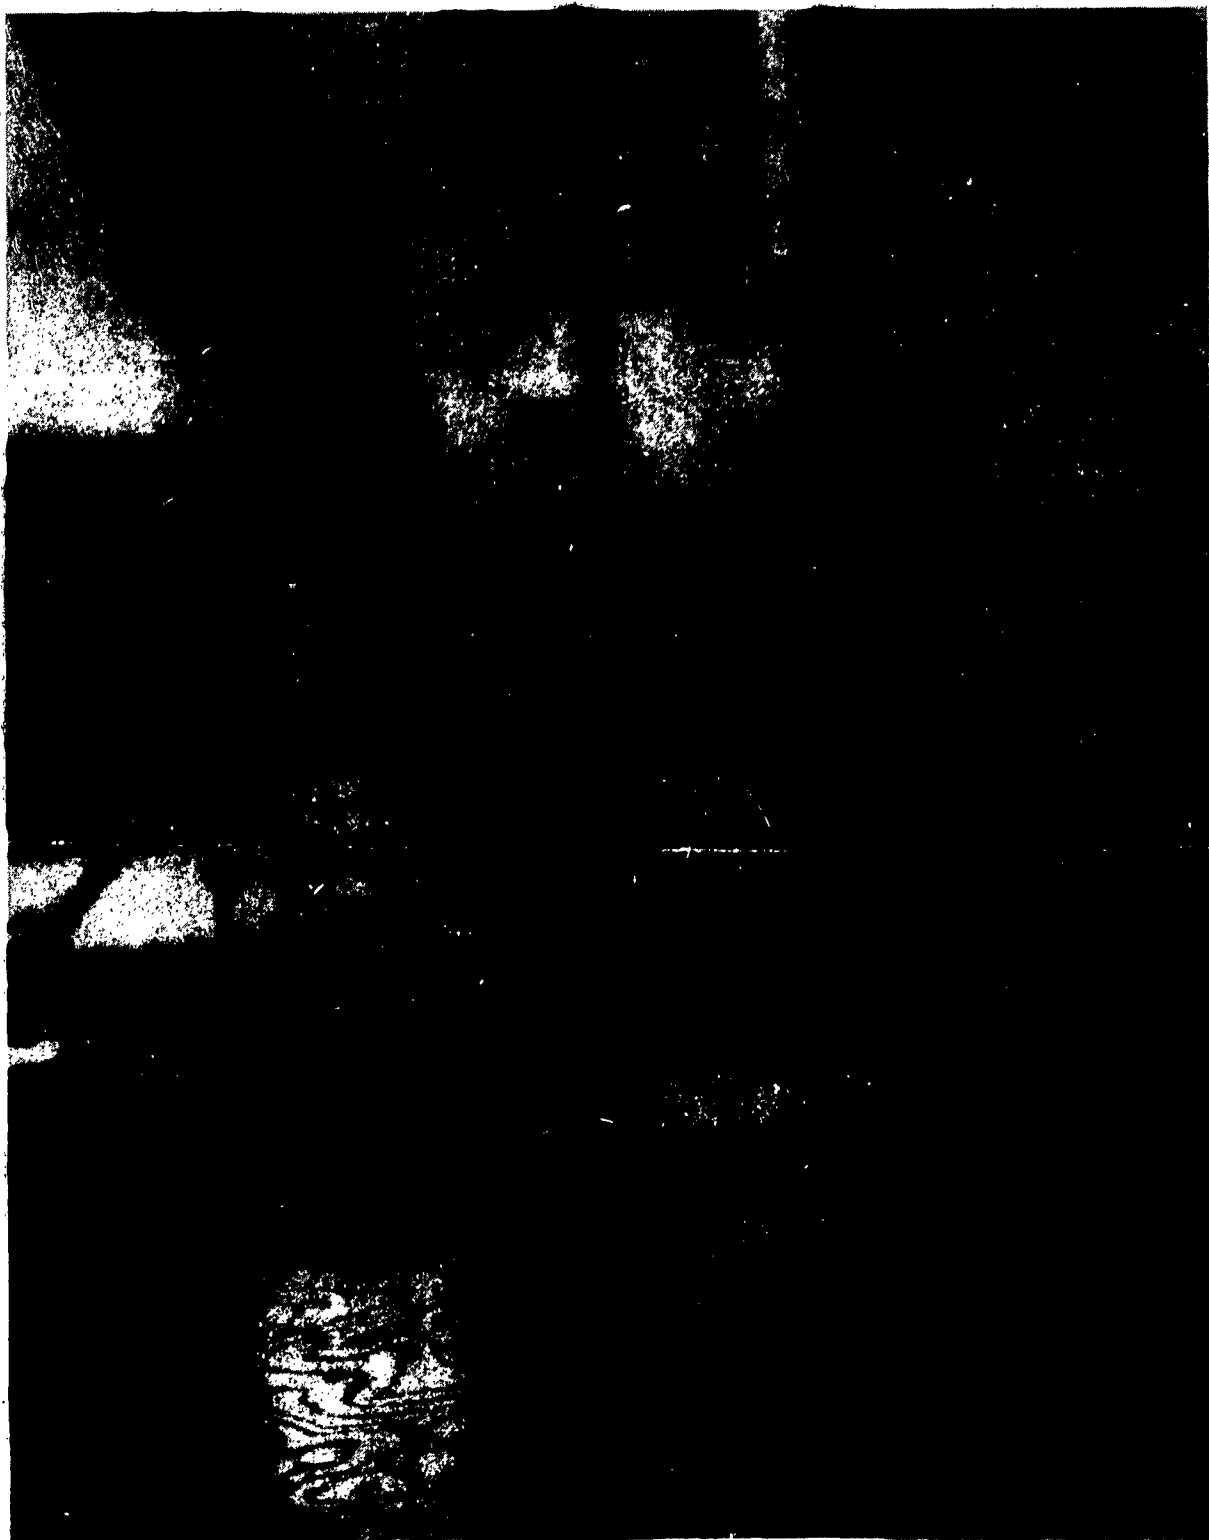


FIGURE C-6
HOT-CELL INTERIOR

opening of the hot-cell access doors occurred. All hot-cell operations were performed by the hot-cell operator from outside the cell using master slave manipulators, and insertable sample receiving tube, and utility controls. The shield cover was removed by the hoist, and the capsule container removed from the shield by locating and pulling out a leader wire with the manipulators. This wire was attached to an aluminum container, which was opened by breaking a wire seal. The quartz capsule containing the isotope was taken out, the foil wrapper removed, and the capsule placed in the jaws of the crushing device. This was then placed in a 400-ml beaker of warm 0.1 N hydrochloric acid. Tightening the thumb screw on the crushing device fractured the quartz, allowing the radioactive La_2O_3 to dissolve in the acid producing a solution of LaCl_3 . Dissolution was hastened by transferring the beaker to a magnetic stirrer.

A 1-ml sample of the solution was prepared for activity assay. This was done by taking a 200- λ sample and diluting it in 250 ml of water in a volumetric flask. The 1-ml sample was withdrawn and placed in a 10-ml beaker in the end of the sample receiving tube, which was pushed through the access tube in the cell wall. This sample was removed from the hot cell and transported to building 47 for counting, to determine the specific activity. Then an amount of the radioactive solution, calculated to contain 5 curies, was poured and measured in the graduated cylinder. This was then transferred, by vacuum, to the collecting jug, through the fritted filter, and diluted with water to provide 400 ml of solution for the next operation.

II. SIMULANT MIXING.

Mixing of sand, isotope, and sodium silicate was done in 500-lb batches in a modified, trailer-mounted, 16-cu ft concrete mixer. Modification included adding internal heating elements and extensions to the mixing blades, and replacement of both doors with special air-tight doors. One door contained a vent pipe for connection to the exhaust system, a slotted pipe that served as a receptacle for the nozzles and air heater, and a small covered feed hatch. The second door had an attached dumping chute that was remotely inserted into the mixer. The mixer was equipped with outrigger legs for support during operation. The mixer exhaust system was identical to that of the hot cell.

Accessory equipment included an inlet air heater and blower, an inclined belt conveyor and funnel for loading the mixer, and a similar conveyor to convey discharged sand from the mixer to the bucket elevator. This inclosed elevator elevated the sand so that it was discharged into the metering hopper through a round spout. Both ends of the mixer are shown in figure C-7.

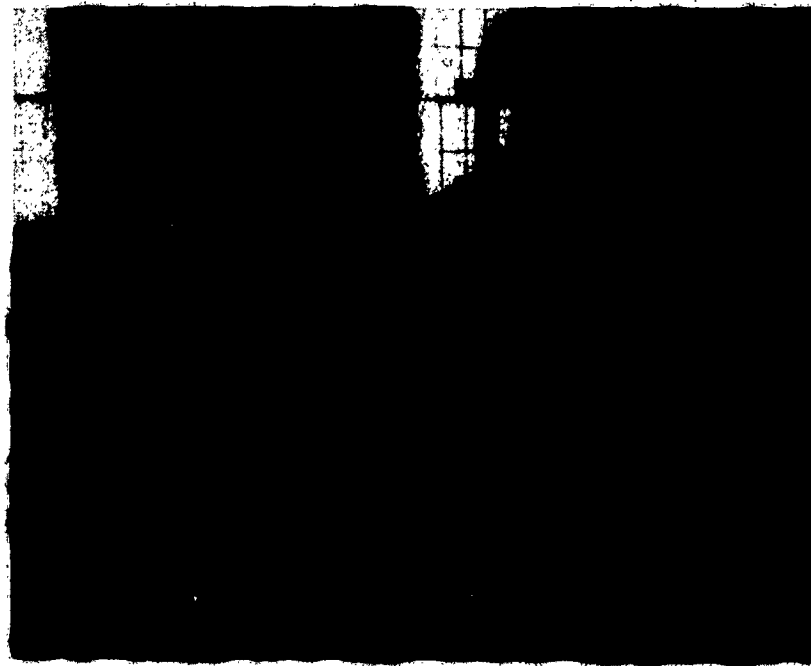


FIGURE C-7

MIXER

- a. Input Side
- b. Discharge Side

Two spray lances, an isotope lance and a silicate lance, were separately used in conjunction with the mixer. The lance was mounted in the mixer bowl along the axial centerline. Each lance had two supply tubes, one of which was the atomizing air line. On the isotope lance there was a Tygon tube connected to the isotope jug in the hot cell. The silicate lance was connected by a hose to a 4-in. diameter glass pipe used as the metered silicate supply. The lances were secured in place on the mixer by snapping two suitcase latches. When not in use, the lances were stored in shielded drip pans. For details of these features, see figure C-8.

In operation the sand was loaded into the mixer and preheated for 1 hr. The isotope lance was mounted in place and the 400 ml of LaCl_3 solution sprayed into the revolving mixer drum. Transfer of isotope from the hot cell to mixer was done by pressurizing the isotope jug with 15-psi nitrogen, forcing the solution through the connecting Tygon flexible line. This line was then rinsed by passing through 200 ml of water. Next, the isotope lance was removed and replaced by the sodium silicate lance. Five liters of 19% sodium silicate were sprayed into the drum to coat the tagged sand particles, and the line was then flushed with 1 liter of water. The silicate lance was removed and replaced by the nozzle of the portable air heater. The mixture was then allowed to mix and dry for 2 hr. At this time, a trip on the dump chute was triggered remotely, inserting this chute into the mixer by spring action. The conveyor and bucket elevator then transferred the simulant to the metering hopper.

III. CONTAMINANT FIXATION.

The final process in the simulant production was baking the coated sand at $1,000^\circ\text{C}$ for 1 hr in order to fuse the sodium silicate. This involved loading the sand into six pans of 42 lb each to make up a 250-lb batch in the baking furnace. Two such batches constituted a 500-lb production run. Following baking, the pans of sand were cooled and delivered to a final portable hopper.

The metering hopper was a dual hopper that dispensed a fixed amount of sand into each pan. The 500-lb capacity upper hopper received sand from the bucket elevator discharge spout. Directly below the upper bin was a mechanism with two remotely controlled pneumatic-powered slide gates. Opening and closing the upper slide allowed 42 lb of sand to fill the lower hopper. A pan on the tray line below this lower hopper was filled by manipulation of the lower gate. The dual hopper is shown in figure C-9.

Accessory equipment included a gravity-feed roller conveyor to support and supply pans, a remotely controlled hydraulic pusher to move filled pans, and a rail-tray line for the movement of filled pans to the furnace.

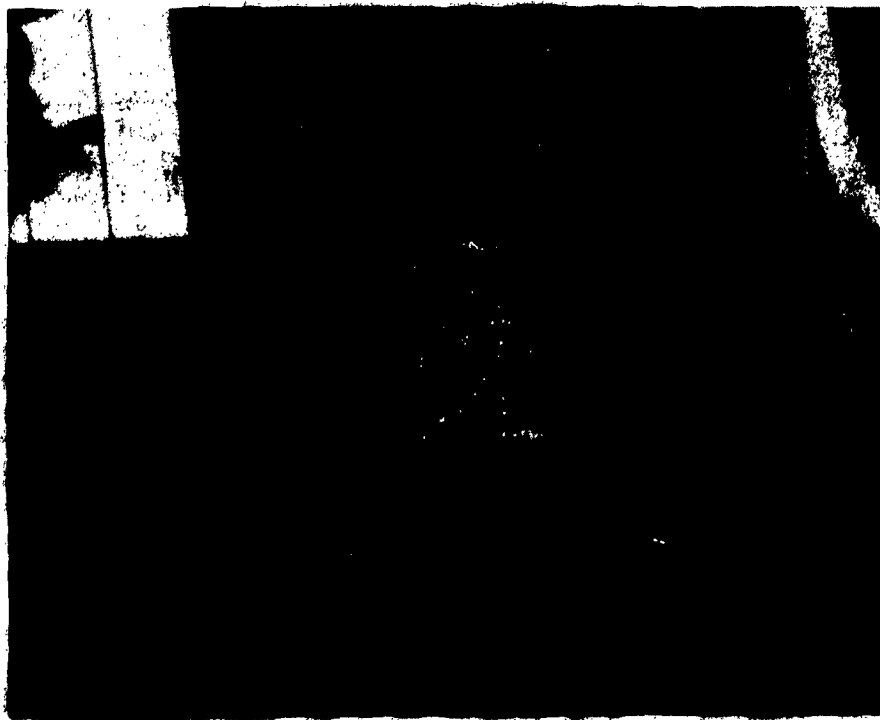
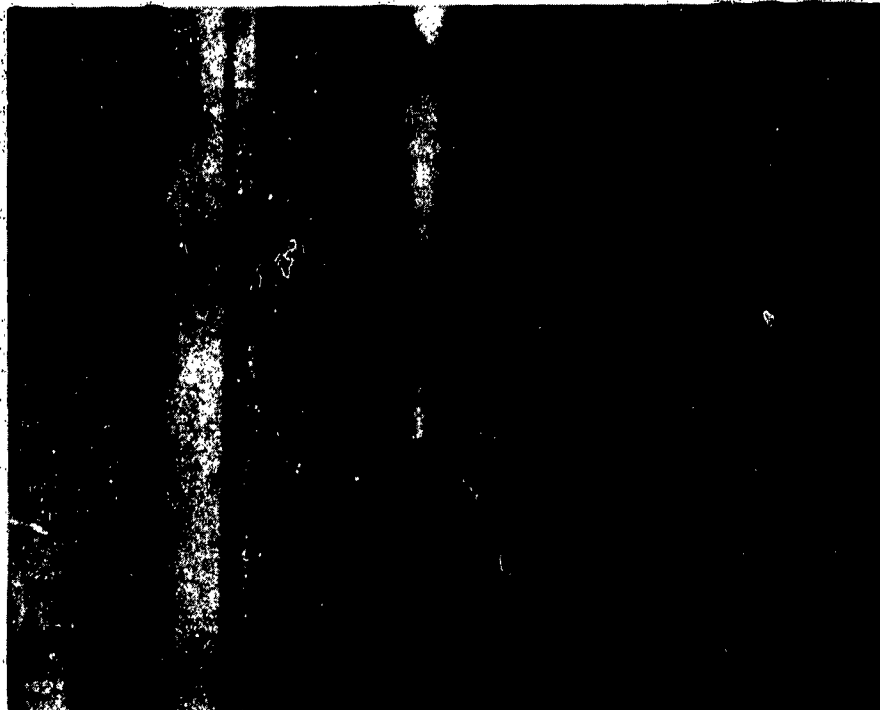


FIGURE C-8 .

LANCER OPERATION (PRACTICE RUN)

- a. Inserting Lance Into Mixer
- b. Storing Lance in Drip Pan

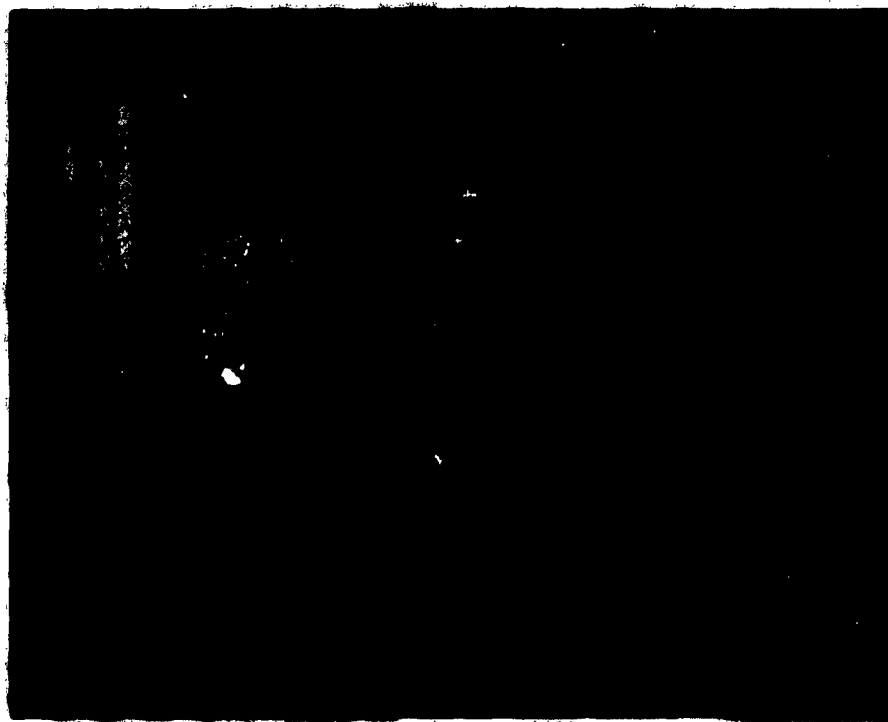


FIGURE C-9

METERING HOPPER

- a. Showing Pneumatic Cylinder Actuators
- b. Position of Hopper in Relation to Furnace

The furnace was a hearth area box, open at both ends, with over-all dimensions of 14 by 4 by 10 ft that weighed 15 tons. Into the bottom of the hearth were inserted three carbofrax skid rails. The heat was furnished by six diesel oil burners. The fuel was atomized by air supplied by a compressor at 90 psi at a rate of 40 cfm (std.). Combustion air was supplied by a 2 hp blower operating at a 9-in. water-gage pressure. Venting of combustion gases was accomplished by a hood canopy and a sheet-metal chimney with a 14,000-cfm coaxial blower in the chimney duct. The furnace with the exhaust hood is shown in figure C-10. The doors at each end were permanently kept open to permit the exhausting of combustion gases and the entering and discharging of pans being processed. The furnace was lined with refractory brick and had a sprung-arch roof. The temperature was controlled by means of a thermocouple and a solenoid-operated fuel valve.

At the end of the production line was a hopper into which all processed sand was dumped. This hopper was located at the top of the final incline of the rail-tray line. As the pans were pushed past the end of the incline they were tipped forward, and then overturned by the following pan. This dumped the sand into the hopper, with the overturned empty pans being retained by a gravity-roller conveyor. Figure C-11 illustrates this operation. The bottom of the hopper was equipped with a small roll grinder under which was accommodated a portable hopper used for loading the spreader truck. A mechanical, remotely controlled gate was provided at the end of the roller conveyor to control the passage of empty pans.

The extreme heat of the pans and their contents and the insulating qualities of the sand made it imperative that cooling of the sand be accelerated. This was accomplished by drilling a well at the east end of building 37 to provide a source of water that would spray on the underside of the pans as they came out of the furnace. The pans were sprayed until the sand was dumped into the hopper at the end of the line.

IV. FINAL CONTAMINANT HANDLING AND SPREADING.

The final hopper in the production line, containing 500 lb of simulant, was manually pulled from building 37 by a 15 ft long pole hook. It was then picked up by a shielded fork-lift truck and maneuvered so that the loaded hopper was located above the bin of a Burch Hydron sand spreader mounted on a 5-yd dump truck. The operator dumped the simulant into the spreader bin by activating the release mechanism with the long pole hook (see figure C-12). The truck was then driven to the test area.

The sand spreader is a commercial unit, with a friction power take-off from the truck's rear wheels. It is designed to uniformly

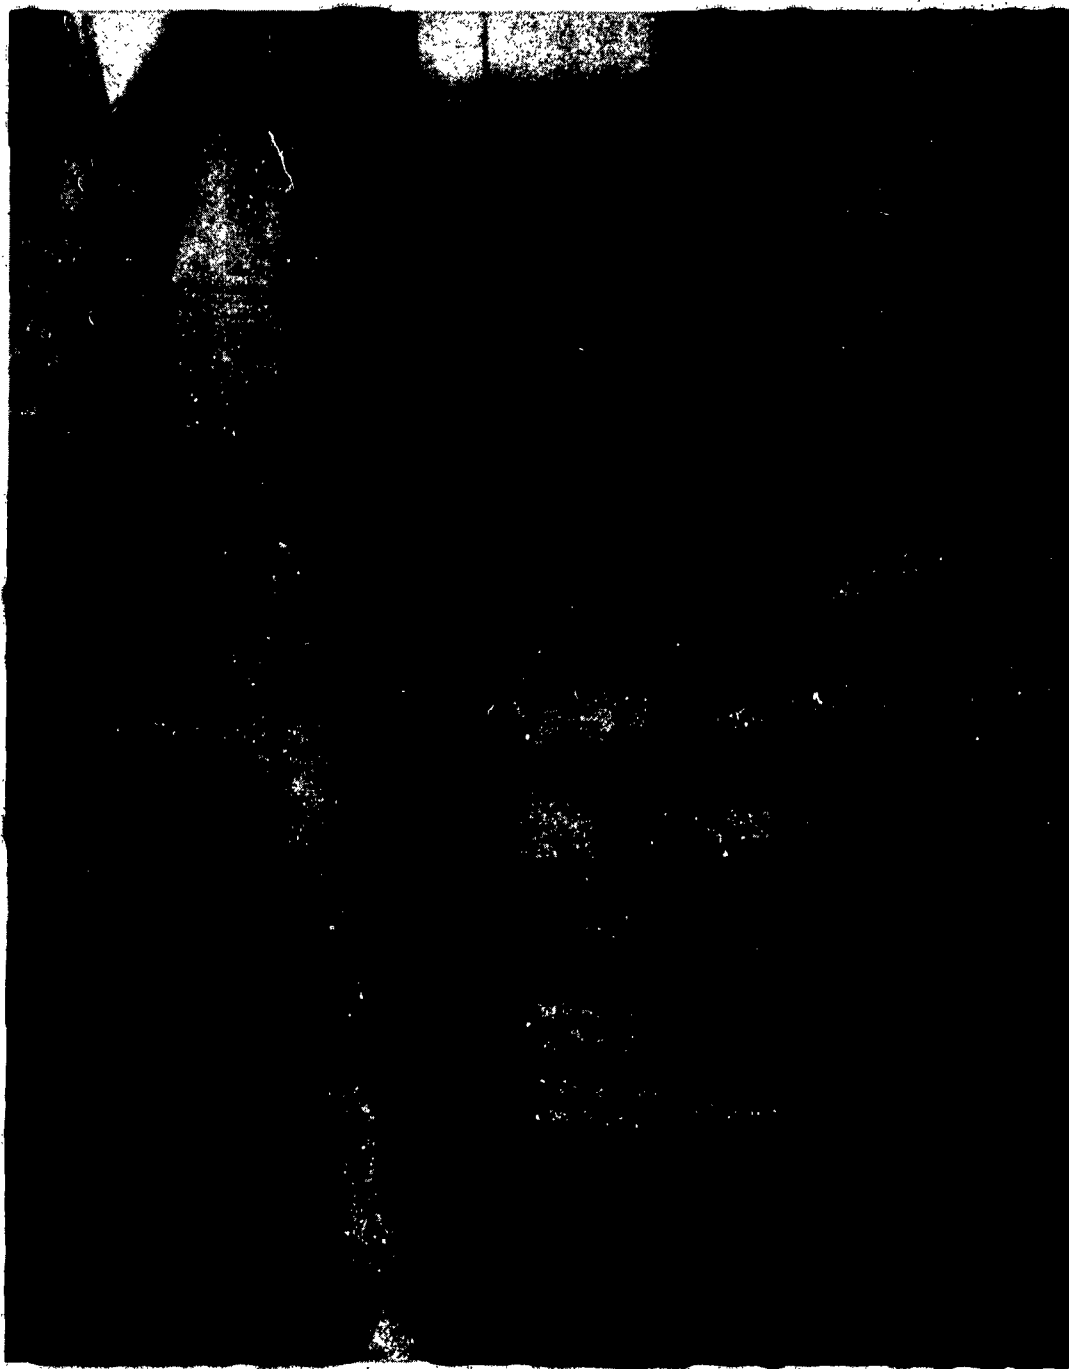


FIGURE C-10
HIGH TEMPERATURE FURNACE AND HOOD



FIGURE C-11
EMPTYING PANS OF PROCESSED SAND

spread road surfacing and antiskid material. Uniformity was enhanced by adding an extension trough at the outlet end to smooth-feed variations caused by material delivery splines, and to limit the free fall of material to 2 to 3 in. when the truck bed is raised (see figure C-12). The model used spread a path of nominal 7 ft width. In practice, three passes produced a 20-ft wide contaminated strip. Operationally, the truck was driven at a crawl, with power take-off engaged before starting, to minimize slippage of snow or moisture-coated friction drive wheels.

In the roof test, a 2-ft wide Scott lawn spreader was used. This was modified to include a 10-ft long handle extension and tachometer (see figure C-13). The spreader was loaded manually, using simulant left over from other operations.

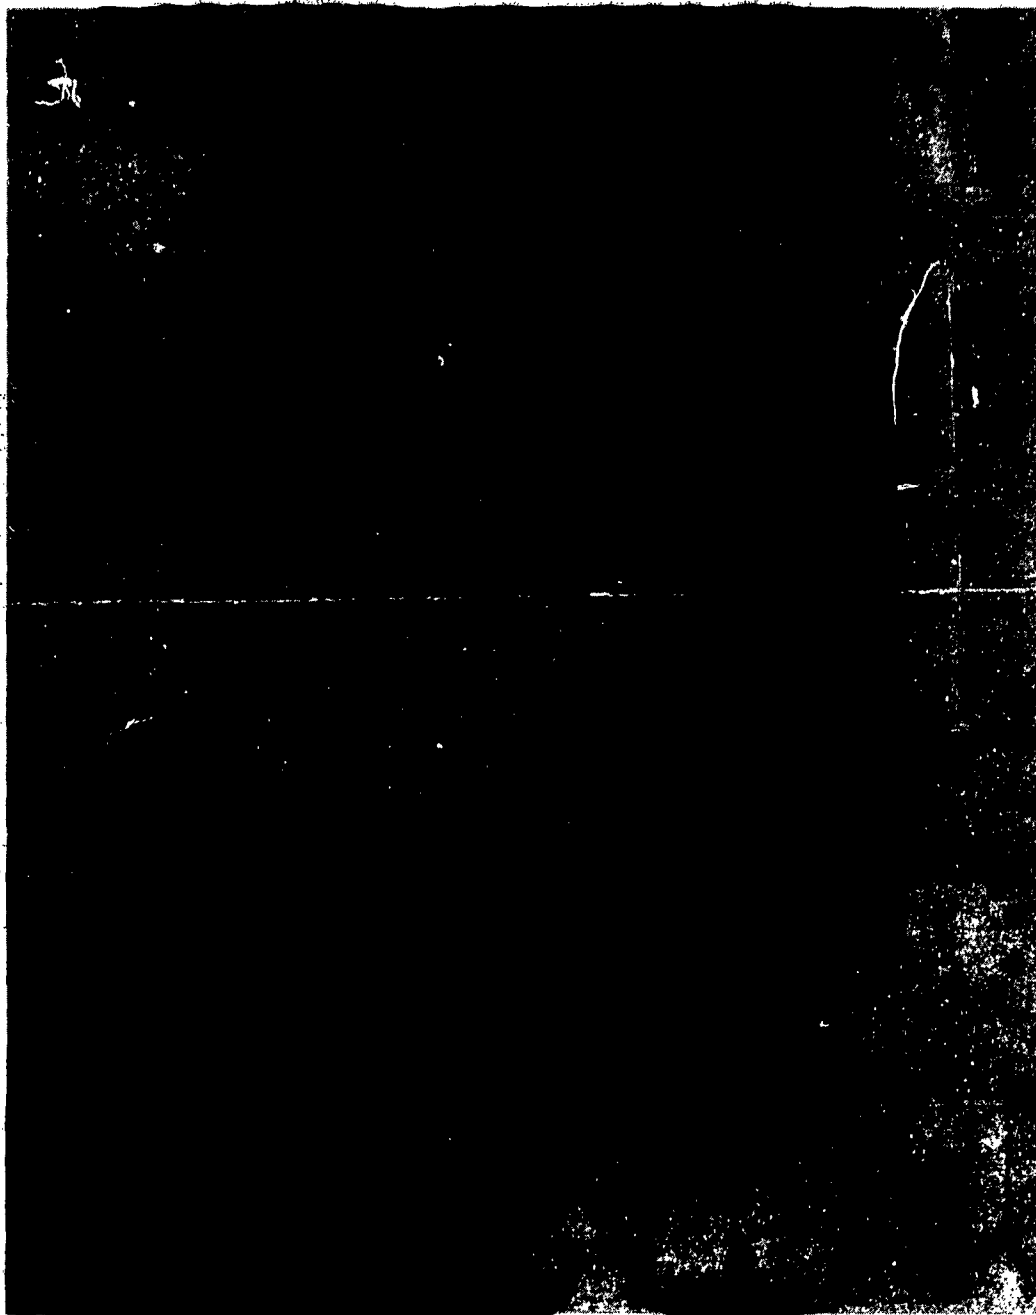


FIGURE C-12

TRANSFERRING SAND FROM HOPPER TO SPREADER



FIGURE C-13
SHEDDING FAULTOUT SIMULANT ON ROOF

APPENDIX D

EXPERIMENTAL DATA

I. DESCRIPTION OF DATA.

The data collected from the field tests consist of the (1) radiation measurements in milliroentgens per hour at the various positions over the test areas before and after decontamination, (2) mass level and the specific activity of the fallout simulant collected in the sample pans, (3) decontamination time, (4) maximum decontamination equipment operator dose rate, and (5) air temperature.

II. DATA CORRECTIONS.

The radiation measurements taken under field conditions with radiac meters were corrected for instrument calibration, relative position of the meter over the test area, and the decay of the radioisotope on the simulant. Theoretical considerations for neglecting other errors and the method of correction of radiation measurements for meter position were presented in a previous report. *

Correction factors for each of the measurements points, as derived in the above referenced report for a 100 by 20 ft test area, are as follows:

<u>Distance from end of area ft</u>	<u>Distance from side of area</u>		
	<u>At 3.33 ft</u>	<u>At 10 ft</u>	<u>At 16.67 ft</u>
20	1.21	1.04	1.21
40	1.16	1.00	1.16
60	1.16	1.00	1.16
80	1.21	1.04	1.21

All radiation measurements are corrected for decay to the time of decontamination, using the formula

$$I_o = I_R e^{0.017t}$$

* Meredith, John L. Method of Evaluation of Experimental Radiation Measurements Over a Rectangular Source. USA CmC NDL-TR-11. UNCLASSIFIED Report.

where

I_0 = intensity at time of decontamination
 I_R = intensity at time of measurement
 t = time in hours between decontamination and measurement
 e = base of natural logarithm


III. TABULATION OF DATA.

A. Test Data Tables.

The data collected from the field tests are presented in tabular form for each test. The tests are identified by number, type of test surface, and method of decontamination. Included in the test-data tables are the following:

1. Air temperature at the time of decontamination.
2. Dimensions of the test area.
3. Specific mass level (grams per square foot) of simulant collected in sample pans, the pan's position on the test area, and the mean and standard deviations of the mass level.
4. The specific activity (microcuries per gram) of the simulant collected in the sample pans, corrected to the time of decontamination.
5. Decontamination time required for the test area, which includes maneuvering time.
6. The maximum dose rate received during decontamination by the equipment operator.
7. Observations of factors affecting test measurements, results, or conclusions.
8. Radiation-level measurements taken over the test area corrected for instrument calibration, and the position of each measurement over the test area. The position coding system, applicable for

the radiation measurement and simulant-collection positions, is illustrated below:

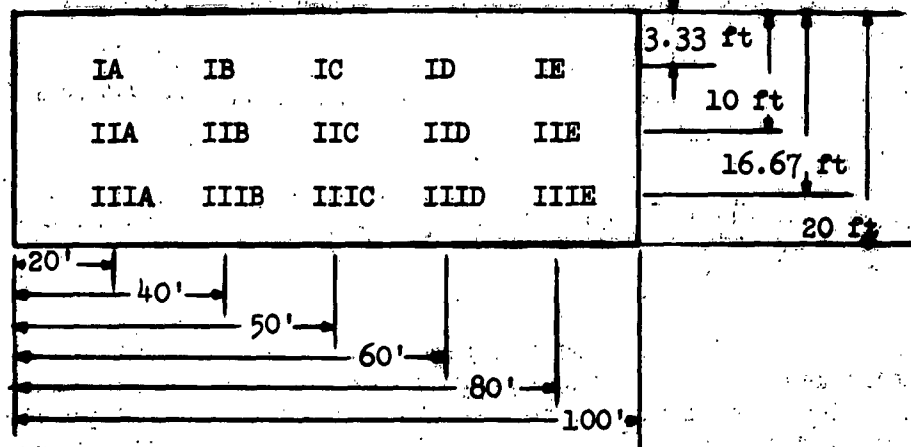

B. Analysis of Data.

In addition to the field data, the tables also include radiation measurements corrected for position and decay and calculated percentage of decontamination. Each radiation measurement was corrected by multiplication of the field measurement by applicable position and decay correction factors. The resulting values were analyzed for percentage of decontamination by the following methods:

1. A total-area decontamination percentage was derived for comparison of the various tests in this series. The mean, \bar{X} , and the standard deviation, s , of each set of corrected measurements were calculated by the equations

$$\bar{X} = \frac{\sum x}{N} \quad (1)$$

$$s = \sqrt{\frac{\sum x^2 - N(\bar{X})^2}{N - 1}} \quad (2)$$

where

$\sum x$ = sum of measurements
 $\sum x^2$ = sums of squares of measurements
 N = number of measurements

The percentage of decontamination and 80% confidence range was then calculated from these values as follows (subscript 1 denotes before decontamination and subscript 2, after decontamination):

$$\text{Per cent decontamination} = \frac{\bar{x}_1 - \bar{x}_2}{\bar{x}_1} (100) \quad (3)$$

$$\text{Range} = \frac{100}{\bar{x}_1} \left\{ \bar{x}_1 - \bar{x}_2 \pm 0.370 \sqrt{s_1^2 + s_2^2} \left[1 + 0.060 \left(\frac{s_1^4 + s_2^4}{(s_1^2 + s_2^2)^2} \right) \right] \right\} \quad (4)$$

2. Decontamination percentages were calculated for each measurement point and subsequently analyzed for an over-all mean and range for that test. These results would be used for projection to large or infinite areas. Each point's decontamination percentage was calculated by the equation

$$\text{Per cent decontamination} = 100 \frac{(x_1 - x_2)}{x_1} \quad (5)$$

The mean (\bar{x}) and standard deviation, s , of the decontamination percentages were calculated using equations (1) through (5). The range about the mean percentage was then determined by the equation

$$\text{Range} = \pm 1.282 s \quad (6)$$

TEST NUMBER I: Bare Frozen Ground Decontaminated by Vacuum Sweeper

1. Air temperature: 31°F
 2. Area dimension: 100 x 20 ft
 3. Simulant mass level: Pan position
- | | Mass level
gm/sq ft |
|------|------------------------|
| IE | 23.3 |
| IIC | 50.6 |
| IIIA | 53.3 |
| Mean | 42.4 |
| SD | 16.6 |

4. Simulant specific activity: 4.0 $\mu\text{C/gm}$
5. Decontamination time: 3 min
6. Maximum operator dose rate: 30 mr/hr
7. Observations: The vacuum sweeper did not have room at one end to leave the test area to turn around. It was noted that the contaminant was not picked up under these turns.

8. Radiation measurements:

Position	Contaminated area		Decontaminated area		Percentage of decontamination
	Field measurement	Corrected value	Field measurement	Corrected value	
	mr/hr		mr/hr		%
IA	19	23	1.0	1.2	94.8
IB	21	24	1.4	1.7	92.9
ID	20	23	1.4	1.7	92.6
IE	17	21	1.9	2.3	89.0
IIA	25	26	1.4	1.5	94.2
IIB	25	25	1.9	1.9	92.4
IID	22	22	2.0	2.0	90.9
IIE	21	22	2.7	2.9	86.8
IIIA	19	23	1.0	1.2	94.8
IIIB	19	22	1.8	2.1	90.5
IIID	23	27	1.9	2.2	91.9
IIIE	21	25	1.6	2.0	92.0
Mean		23.6		1.9	91.9
SD		1.8		0.5	
Range					86.9 - 94.9

NOTE: Total area decontamination percentage: 91.9
Total area decontamination range percentage: 89.0 - 94.9

TEST NUMBER II: Bare Frozen Ground Decontaminated by Mechanized Sweeper

1. Air temperature: 31°F
2. Area dimension: 100 x 20 ft
3. Simulant mass level: Pan position

Mass level
gm/sq ft

IE	55.3
IIC	42.4
IIIA	34.3
	<u>44.0</u>
Mean	10.6
SD	

4. Simulant specific activity: 3.8 $\mu\text{C/gm}$
5. Decontamination time: One pass, 6 min; two passes, 15 min
6. Maximum operator dose rate: 50 mr/hr
7. Observations: All sweeper passes were made in the direction from A to E.
The contaminant tended to accumulate ahead of the sweeper.
8. Radiation measurements:

Position	Contaminated area		Decontaminated area				Percentage of decontamination	
	Field measurement	Corrected value	One pass		Two passes		One pass	Two passes
			Field measurement	Corrected value	Field measurement	Corrected value		
IA	18	22	5	6	1.6	2.0	72.7	90.9
IB	19	22	5	6	2.0	2.4	72.7	89.1
ID	22	26	6	7	2.0	2.4	73.1	90.8
IE	21	25	6	7	4.2	5.2	72.0	79.2
IIA	19	20	5	5	1.4	1.5	75.0	92.5
IIB	21	21	5	5	2.0	2.1	76.2	90.0
IID	20	20	6	6	2.0	2.1	70.0	89.5
IIE	20	21	8	8	3.1	3.3	61.9	84.3
IIIA	17	21	4	5	1.6	2.5	76.2	88.1
IIB	17	20	4	5	1.6	2.4	75.0	88.0
IIID	20	23	6	7	2.1	2.5	69.6	89.1
IIIE	20	24	10	12	4.2	5.2	50.0	78.3
Mean		22.1		6.6		2.8	80.3	87.5
SD		2.2		2.0		1.2		
Range							67.3-73.3	81.7-93.3

NOTE: Total area decontamination percentage: $\frac{70.1}{87.3}$
Total area decontamination range percentage: 65.1-75.1

TEST NUMBER III: Bare Frozen Ground Decontaminated by Fire Hosing

1. Air temperature: 8°F
2. Area dimension: 100 x 20 ft
3. Simulant mass level: Pan position Mass level
gm/sq ft

IE	21.5
IIC	47.3
IIIA	28.0
Mean	32.3
SD	13.4

4. Simulant specific activity: 9.0 $\mu\text{C/gm}$
5. Decontamination time: 10 min
6. Maximum operator dose rate: 10 mr/hr
7. Observations: Fire hosing of frozen ground resulted in an almost immediate glazing of the surface with majority of the contaminant under this thin layer of ice.
Continued hosing would not affect this glaze.

8. Radiation measurements:

Position	Contaminated area		Decontaminated area		Percentage of decontamination
	Field measurement	Corrected value	Field measurement	Corrected value	
	mr/hr		mr/hr		
IA	21	25	19	25	0.0
IB	22	26	19	24	7.7
ID	20	23	18	23	0.0
IE	22	27	19	25	7.4
IIA	27	28	21	24	14.3
IIB	29	29	25	27	6.9
IID	30	30	25	27	10.0
IIE	29	30	23	26	13.3
IIIA	25	30	22	29	3.3
IIIB	26	30	22	28	6.7
IIID	27	31	22	28	9.7
IIIE	25	30	22	29	3.3
Mean	28.3		26.3		6.9
SD	2.5		2.1		
Range					1.0 - 12.8

NOTE: Total area decontamination percentage: 7.1
Total area decontamination range percentage: 0.4 - 13.8

TEST NUMBER IV: Packed Snow Decontaminated by Fire Hosing

1. Air temperature: 13°F
2. Area dimension: 100 x 20 ft
3. Simulant mass level: Pan position

IE	Mass level
IIC	gm/sq ft
IIIA	47.2
Mean	62.8
SD	31.0
	47.0
	15.9
4. Simulant specific activity: 8.7 $\mu\text{C/gm}$
5. Decontamination time: 20 min
6. Maximum operator dose rate: 10 mr/hr
7. Observations: Fire hosing of packed snow resulted in no runoff of water, all of it being immediately absorbed by the snow. The test area was two 50 by 20 ft plots, instead of the reported 100 by 20 ft; however, because of the extremely poor results, no effort was made to correct data for position, except only for decay.
8. Radiation measurements:

Position	Contaminated area		Decontaminated area		Percentage of decontamination
	Field measurement mr/hr	Field measurement	One pass	Corrected value	
			Field measurement		
IA	29	22	24	17.2	
IB	27	27	29	- 7.4	
ID	29	22	24	17.2	
IE	30	25	27	10.0	
IIA	37	31	34	8.1	
IIB	33	30	33	0.0	
IID	34	25	27	20.6	
IIE	31	26	28	9.7	
IIIA	36	29	32	11.1	
IIIB	26	27	29	- 11.5	
IIID	26	22	24	7.7	
IIIE	23	17	19	17.4	
Mean	30.1		27.5	8.3	
SD	4.3		4.3		
Range				0 - 21.9	

NOTE: Total area decontamination percentage: 8.6
 Total area decontamination range percentage: 1.0 - 16.3

TEST NUMBER V: Bare Roof Decontaminated by Fire Hosing

1. Air temperature: 21°F
2. Area dimension: 60 x 20 ft
3. Simulant mass level: No data
4. Simulant specific activity: 8.8 $\mu\text{C/gm}$
5. Decontamination time: 15 min
6. Maximum operator dose rate: 5 mr/hr
7. Observations: The position correction factors used for the evaluation of the roof area are different because of the smaller size of the test area, and the equations of statistical analyses are different because of smaller number of measurement points; however, the same methods were employed.
8. Radiation measurements:

Position	Contaminated area		Decontaminated area		Percentage of decontamination
	Field measurement	Corrected value	Field measurement	Corrected value	
mr/hr			mr/hr		%
IA	17	20	2.8	3.6	82.0
IB	17	20	2.2	2.8	86.0
ID					
IE					
IIA	17	17	3.3	3.6	78.8
IID	19	19	2.2	2.4	87.4
III					
IIIA	13	15	2.9	3.7	75.3
IIIB	17	20	2.0	2.6	87.0
IIID					
IIIE					
Mean		18.5		3.1	82.8
SD		6.6		0.6	
Range					76.5-89.1

NOTE: Total area decontamination percentage: 83.2
Total area decontamination range percentage: 64.9 - 100.0

TEST NUMBER VI: Packed Snow Decontaminated by Motor Grader

1. Air temperature: 24°F
2. Area dimension: 100 x 20 ft
3. Simulant mass level: Pan position

Mass level
gm/sq ft

IE	45.0
IIC	59.9
IIIA	38.5
Mean	47.8
SD	11.0

4. Simulant specific activity: 9.3 µC/gm
5. Decontamination time: 15 min
6. Maximum operator dose rate: 10 mr/hr
7. Observations: A noticeable amount of contaminant worked its way under the blade, requiring the area to be scraped twice. The blade angle was set to allow no snow to fall over the blade. Results listed under "One pass" are measurements taken after two scrapes with the windrow 10 ft from the III side of the area. Data under "Two passes" were collected after the windrow had been removed.
8. Radiation measurements:

Position	Contaminated area		Decontaminated area		Percentage of decontamination	
	Field measurement	Corrected value	One pass Field measurement	Corrected value	One pass	Two passes
		mr/hr		mr/hr		%
IA	19	23	6	8	65.2	78.3
IB	22	26	5	6	76.9	76.9
IC	25	29	7	9	69.0	82.8
IE	23	28	5	7	75.0	82.1
IIA	26	27	7	8	70.4	77.8
IIB	26	26	8	9	65.4	73.1
IID	30	30	10	11	63.3	66.7
IIE	25	26	8	9	65.4	80.8
IIIA	19	30	9	12	47.8	65.2
IIIB	22	26	9	12	53.8	65.4
IIID	22	26	11	14	46.2	53.8
IIIE	19	23	8	11	52.2	69.6
Mean		26.1		9.7	62.6	72.7
SD		2.3		2.3		
Range					49.5-75.7	61.5-83.9

NOTE: Total area decontamination percentage: 62.8
 Total area decontamination range percentage: 58.2 - 67.4

Without windrow
 72.8
 65.5 - 80.1

TEST NUMBER VII: Packed Snow Decontaminated by Vacuum Sweeper

1. Air temperature: 25°F
2. Area dimension: 100 x 20 ft
3. Simulated mass level: Pan position
4. Simulant specific activity: 8.5 $\mu\text{C/gm}$
5. Decontamination time: 20 min
6. Observations: The sweeper repeatedly became stuck on the relatively smooth packed snow, requiring it to be towed by another vehicle to get started.
7. Radiation measurements:

Mass level gm/sq ft
IE
IIC
IIIA
Mean
SD

Position	Contaminated area		Decontaminated area		Percentage of decontamination
	Field measurement	Corrected value	Field measurement	Corrected value	
	mr/hr		mr/hr		
IA	29	35	7	9	74.3
IB	26	30	7	9	70.0
ID	23	27	7	9	66.7
IE	22	27	7	9	66.7
IIA	27	28	7	8	71.4
IIB	26	26	8	9	65.4
IID	25	25	8	9	64.0
IIE	22	23	7	8	65.2
IIIA	17	21	6	8	61.9
IIB	17	20	5	6	70.0
IID	17	20	6	7	65.0
IIE	17	21	6	8	61.9
Mean	25.3		8.3		66.9
SD	4.6		1.0		
Range					62.0 - 71.8

NOTE: Total area decontamination percentage: 67.2
Total area decontamination range percentage: 55.7 - 78.7

TEST NUMBER VIII: Packed Snow Decontaminated by Mechanized Sweeper

1. Air temperature: 26°F
2. Area dimension: 100 x 20 ft
3. Simulant mass level: Pan position

	Mass level gm/sq ft
IE	29.2
IIC	46.2
IIIA	25.8
Mean	33.7
SD	10.9

4. Simulant specific activity: 8.9 $\mu\text{C/gm}$
5. Decontamination time: 20 min
6. Observations: Reported data are for two passes. After one pass, it was visually determined that a second pass would be required.
7. Radiation measurements:

Position	Contaminated area		Decontaminated area		Percentage of decontamination
	Field measurement	Corrected value	Field measurement	Corrected value	
	nr/hr		nr/hr		One pass
IA	26	31	7	9	71.0
IB	30	35	7	9	74.3
ID	33	38	8	10	73.7
IE	30	36	9	12	66.7
IIA	29	30	8	9	70.0
IIB	30	39	7	8	73.3
IID	31	31	7	8	74.2
IIE	26	27	7	8	70.4
IIIA	22	27	5	6	77.8
IIIB	26	30	6	7	76.7
IIID	25	29	4	5	82.8
IIIE	23	28	4	5	82.1
Mean		31.0		8.0	74.4
SD		3.5		2.0	
Range					68.2 - 80.6

NOTE: Total area decontamination percentage: 74.2
Total area decontamination range percentage: 66.1-82.3

TEST NUMBER IX: Loose Snow on Packed Snow Decontaminated by Motor Grader

1. Air temperature: 24°F
2. Area dimension: 100 x 20 ft
3. Simulant mass level: Pan position

Mass level
gm/sq ft
43.0
46.4
6.2
31.9
22.2

IE
IID
IIIA
Mean
SD

4. Simulant specific activity: 5.4 $\mu\text{C/gm}$
5. Decontamination time: 10 min
6. Observations: This test was a little different than test VI because the loose snow was about a week old. The windrow was pushed into a ditch beside the test area. Two scrapes were made.
7. Radiation measurements:

Position	Contaminated area		Decontaminated area		Percentage of decontamination
	Field measurement	Corrected value	Field measurement	Corrected value	
	mr/hr		mr/hr		One pass
IA	21	25	6	7	72.0
IB	21	24	7	8	66.7
ID	21	24	7	8	66.7
IE	21	25	7	9	64.0
IIA	21	22	7	7	68.2
IIB	21	21	9	9	57.1
IID	21	21	7	7	66.7
III	21	22	7	7	68.2
IIIA	13	16	7	9	43.8
IIIB	15	17	9	9	47.1
IIID	17	20	9	9	55.0
IIIE	17	21	6	7	66.7
Mean		21.5		8.0	61.9
SD		2.9		1.0	
Range					54.6-72.2

NOTE: Total area decontamination percentage: 62.8
Total area decontamination range percentage: 54.0-71.6

APPENDIX E

HEALTH-PHYSICS DATA

I. GENERAL.

The exhaustive dry runs and rehearsals, in addition to a liberal application of applied shielding everywhere it would fit, resulted in no significant radiation doses to personnel. The highest total dose absorbed was 0.3 r for any one person. There were no above-tolerance aerosols detected, and no change in the radiation background environment of the camp that could be attributed to this project. One month after operations ceased, radiation surveys made by the Cook Research Laboratories, Morton Grove, Illinois, and the Health Physics Office of this Laboratory were negative.

II. IMPURITIES IN IRRADIATED MATERIALS.

Two capsules of La_2O_3 , irradiated at Argonne National Laboratories (ANL), were allowed to decay for 5 mo so that the La^{140} should be completely undetectable. Any residual activity would be due to impurities in the material irradiated. Experimentation at this Laboratory has revealed that the minute residual activity in the capsules is approximately 20% cesium-134 (Cs^{134}) and the remainder a mixture of the three isotopes of europium (Eu). The total activity released at Camp McCoy, Wisconsin, decayed to $< 50 \mu\text{C}$ after 30 days. Practically all waste was carefully buried in accordance with Atomic Energy Commission (AEC) regulations, in the restricted buffer-zone area next to the North Impact Area of the camp. The quantity of Cs^{134} and rare earth isotopes buried is about half that allowed by the AEC in one disposal pit for an unknown mixture of isotopes.

III. PRODUCTION-AREA DOSE LEVELS.

Presented below is a summary of dose levels in the simulant-production area for all operations there, in addition to a schedule for the most active production run (see tables E-1 and E-2).

TABLE E-1

SUMMARY OF DOSE LEVELS IN THE SIMULANT-PRODUCTION AREA a/

Location	Date and time of day dose levels were taken in 1951										
	Mar 7 1340	Mar 8 1215	Mar 9 1105	Mar 9 2050	Mar 10 1000	Mar 14 1030	Mar 15 0837	Mar 16 1445	Mar 17 0910	Mar 20 1315	Mar 21 1120
1	0.01	0.01	0.01	0.6	3.2	0.2	2	0	0.15	0.05	0.03
2	0.01	0.5	b/	b/	b/	0.3	b/	0	10	5	5
3	0.01	0.5	b/	b/	b/	b/	b/	40	55	b/	b/
4	0.01	0.05	0.01	0.8	3.0	0.2	10	0	0.2	0.05	0.05
5	0.01	0.01	0.01	1.0	1.0	0.1	1.8	0	0.35	0.15	0.1
6	b/	0.01	0.01	b/	0.5	0.1	2.8	1	0.3	0.1	0.05
7	0.01	0.05	0.01	1.0	0.1	1	2.6	1	2	0.05	0.05
8	0.01	0.05	0.01	50	b/	6	20	1	5	1	1.5
9	0.01	0.01	0.01	1.5	1.6	1	0.8	1	0.2	0.05	0.05
10	0.01	0.01	0.01	3.2	1.8	0	1.6	1	0.4	0.15	0.1
11	0.01	0.05	0.01	375	b/	0	100	50 c/	10	40	4
12	0.01	0.01	0.01	120	b/	10	5	6	2	0.3	0.5
13	0.01	0.01	0.01	60	b/	0.4	10	4	0.3	0.1	0.15
14	0.01	0.01	0.01	b/	b/	35	300	40	25	3	35
15	0.01	0.01	0.01	b/	1.6	0	3	3	1	0.1	0.05
16	0.01	0.01	0.01	1.3	5.0	0	6	2	1	0.2	0.1
17	0.01	0.01	0.01	6.0	b/	18	46	20	25	10	2
18	0.01	0.01	0.01	2.0	8.0	0.1	4	21	2.5	0.3	0.15
19	0.01	0.01	0.01	b/	1.0	0	4.6	2	2	b/	0.2
20	0.01	0.01	0.01	2.2	8.0	1.4	8	8	1	2	1
21	0.01	0.01	0.01	1.0	0.8	0	6	1	0.5	0.05	0.05
22	0.01	0.01	0.01	1.0	b/	1	6	55	3	1	0.3
23	0.01	0.01	0.01	b/	b/	0	5	1	0	0.02	0.03
24	0.01	0.01	0.01	1.2	b/	0	22	2	12	10	1.25
25	0.01	0.01	0.01	1.2	b/	0	2.8	7	15	2.5	0.35
26	0.01	0.01	0.01	1.0	b/	10	10	2	1	0.2	0.08
27	0.01	0.01	0.01	0.4	b/	0.1	100	1	1.5	0.2	0.2
28	b/	0.01	0.01	0.5	b/	0	4	1	0.2	0.05	0.05
29	0.01	0.01	0.01	b/	b/	0	6	0	1	0.2	0.03
30	b/	0.01	0.01	b/	1.2	0	3	0	0	0.1	0.03
31	0.01	0.01	0.01	0.8	b/	5	20	0	2	0.2	0.1
32	0.01	0.01	0.01	0.5	b/	0	12	0	1.5	0.1	0.05
33	0.01	0.01	0.01	0.2	b/	0.8	4	1	1.5	0.2	0.05
34	0.01	0.01	0.01	0.2	b/	100	120	4	6	1	0.1
35	0.01	0.01	0.01	0.3	b/	0.6	100	0	1	0.05	0.1
36	0.01	0.01	0.01	0.4	b/	0	30	0	0.6	0.1	0.05
37	0.01	0.01	0.01	0.3	5.0 d/	1	14	1	2	0.15	0.1
38	0.01	0.01	0.01	b/	7.0 d/	5	14	3	2	0.2	0.05
39	0.01	0.01	0.01	b/	4.0 d/	0	12	1	1	0.1	0.05

a/ See figure

b/ No data

c/ 2.5 r/hr (Lance, hand dose, maximum) March 16 at 0200 hr

d/ Outside building along wall at these points

TABLE E-2

OPERATING SCHEDULE, 15 AND 16 MARCH 1961 FOR 1,500 POUNDS OF SAND

Procedure	First 500 lb hr	Second 500 lb hr	Third 500 lb hr
Start furnace	0715		
Load sand in mixer	0715	1145	1640
Isotope injection	0830	1310	1805
Silicate injection	0837	1315	1810
Start drying	0917	1346	1939
Dump mixer	1117	1615	2200
1st half to furnace	1140	1630	2225
1st half out of furnace and 2nd half to furnace	1240	1730	2325
1st half to final hopper	1800	2100	0200
2nd half to final hopper	1900	2200	0300
All sand in loading hopper	0400
Clean up and secure building	0430

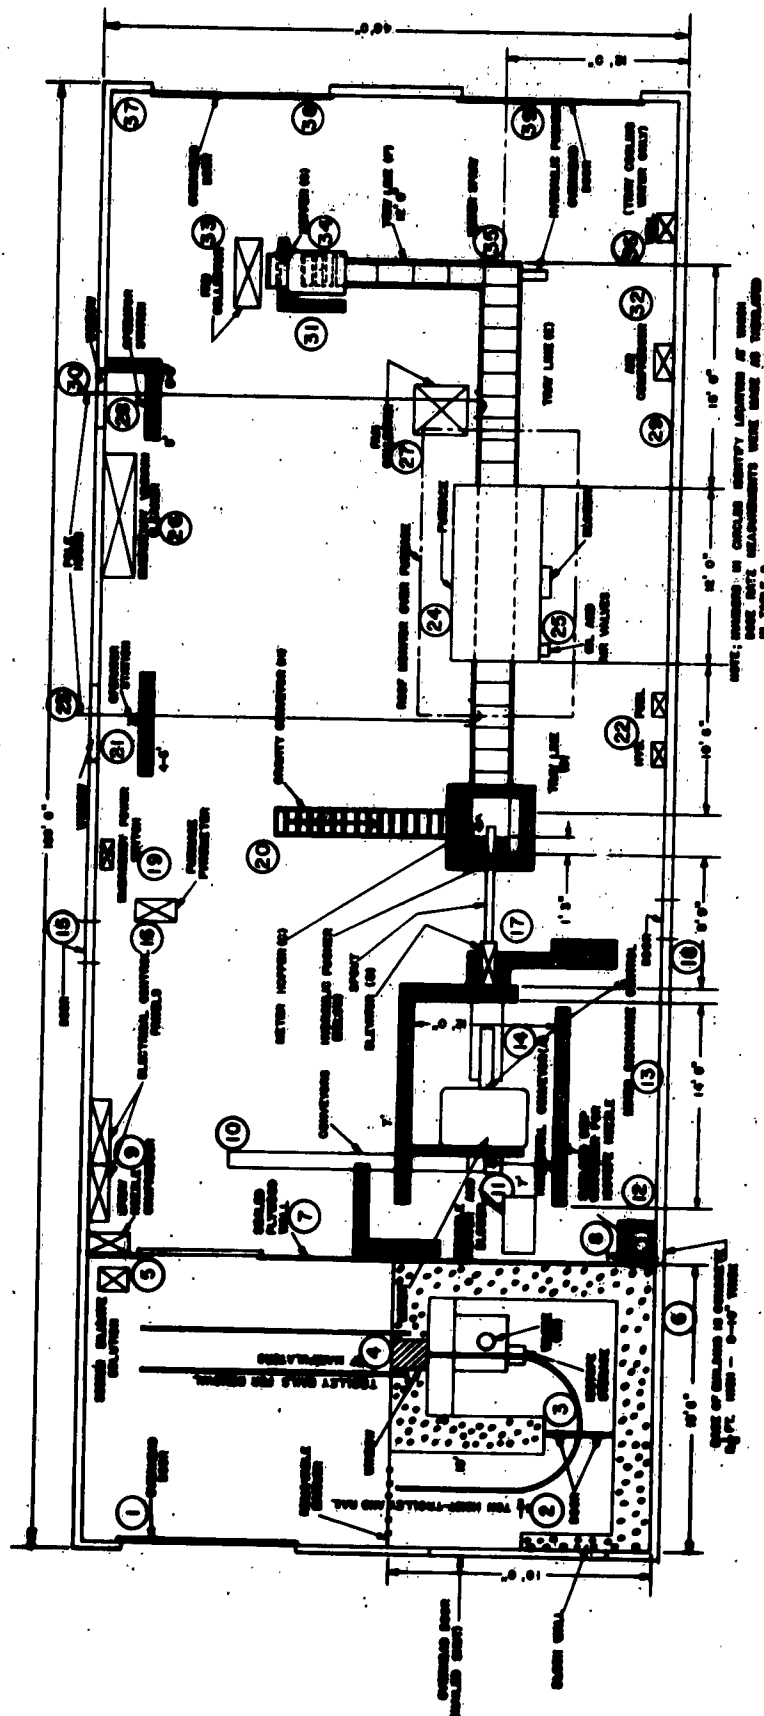


FIGURE
FALLOUT SIMULANT PRODUCTION FACILITY

DISTRIBUTION LIST

Copies

- 1 Mail and File Record Center, NDL (Record Copy)
- 5 CRDL Library, CRD Laboratories
- 4 Publications Branch, Technical Information Division
- 1 CO, Nuclear Defense Laboratory
- 2 Chief, Nuclear Testing Division
- 3 Chief, Administrative Services Office

- 1 Aerospace Medicine Division (AFCSG-11.4), Directorate of Professional Services, Office of the Surgeon General, Headquarters, USAF, Washington 25, D. C.
- 1 Aerospace Technical Intelligence Center, ATTN: AFCIN-4E2a, Wright-Patterson Air Force Base, Ohio
- 1 Air Force Intelligence Center (AFCIN-3W4), Department of the Air Force, Washington 25, D. C.
- 1 Air Force Missile Test Center, Ground Safety Office, ATTN: MTBS, Patrick Air Force Base, Florida
- 1 British Liaison Officer, Bldg 330, Army Chemical Center, Maryland
- 1 Bureau of Ships Technical Library, Department of the Navy, 18th and Constitution Avenues, N. W., Washington 25, D. C.
- 1 Bureau of Yards and Docks, Department of the Navy, ATTN: Code D-440C, Washington 25, D. C.
- 1 BW-CW Division, Office, Atomic, Biological and Chemical Warfare, ODDR&E, Room 3E 1071, The Pentagon, Washington 25, D. C.
- 1 Chairman, Chemical Committee, Command & Staff Department, U. S. Army Infantry School, Fort Benning, Georgia
- 1 Chemical Corps Liaison Officer, CA&S Division, C&S Department, Box 9390, U. S. Army Air Defense School, Fort Bliss, Texas
- 1 Chemical Corps Liaison Officer, U. S. Army Combat Development Experimentation Center, Fort Ord, California
- 1 Chemical Officer, Operations Department, Quartermaster School, Fort Lee, Virginia
- 1 Chief, Atomic Division, Chief of Research and Development, Hq, Department of the Army, Pentagon, Washington 25, D. C.
- 1 Chief, Bureau of Medicine & Surgery, Special Weapons Defense Division (Code 74), Department of the Navy, Washington 25, D. C.
- 1 Chief, Bureau of Naval Weapons, Department of the Navy (RAAE-223), Washington 25, D. C.
- 3 Chief, Bureau of Ships (Code 333), Department of the Navy, Washington 25, D. C.
- 1 Chemical Committee Command and Staff Department, U. S. Army Infantry School, Fort Benning, Georgia
- 2 Chief, Bureau of Ships (Code 362), Department of the Navy, Washington 25, D. C.
- 1 Chief, Bureau of Supplies and Accounts (W1), Department of the Navy, Room 1418, T-3 Building, Washington 25, D. C.

DISTRIBUTION LIST (CONTD.)

Copies

- 3 Chief Chemical Officer, Department of the Army,
Washington 25, D. C.
- 1 Chief, Combat Materiel Division, Office, Chief of Research and
Development, Department of the Army, Washington 25, D. C.
- 1 Chief, Defense Atomic Support Agency, ATTN: Document Library
Branch, Washington 25, D. C.
- 1 Chief, Development Division, Medical Section, U. S. Continental
Army Command, Fort Monroe, Virginia
- 1 Chief of Engineers, ATTN: ENG CW, Department of the Army,
Washington 25, D. C.
- 1 Chief of Engineers, ATTN: ENGMC-EB, Department of the Army,
Washington 25, D. C.
- 1 Chief of Engineers, ATTN: ENGRD-S, Department of the Army,
Washington 25, D. C.
- 1 Chief of Engineers, Department of the Army, Washington 25, D. C.
ATTN: Mr. J. C. Letts
- 1 Chief, Life Sciences Division, Army Research Office, Office of
the Chief of Research and Development, Room 3D442, The Pentagon,
Washington 25, D. C.
- 2 Chief of Naval Operations, Op-922G, The Pentagon, Washington 25, D. C.
- 1 Chief, Nucleonics Section, Research & Engineering Directorate,
Detroit Arsenal, Centerline, Michigan
- 1 Chief, Preventive Medicine Division, Office of the Surgeon General,
Department of the Army, Washington 25, D. C.
- 1 Chief Superintendent, Defense Research Chemical Laboratories,
Defense Research Board, Ottawa, Canada, ATTN: C. E. Clifford,
Atomic Defense Section
- 1 Commandant of the Marine Corps, Headquarters, U. S. Marine Corps,
Washington 25, D. C.
- 1 Commandant, United States Army Aviation School, Fort Rucker,
Alabama, ATTN: Librarian
- 1 Commandant, U. S. Army Armor School, ATTN: Nuclear Weapons Division,
Command & Staff Department, Fort Knox, Kentucky
- 1 Commandant, U. S. Army Command & General Staff College, ATTN:
Archives, Fort Leavenworth, Kansas
- 1 Commander, Air Force Special Weapons Center, ATTN: Technical
Information & Intelligence, Kirtland Air Force Base, New Mexico
- 1 Commander, Air Technical Intelligence Center, ATTN: AFCIN-432a,
Wright-Patterson Air Force Base, Ohio
- 1 Commander, Arctic Aeromedical Laboratory, ATTN: Librarian,
APO 731, Seattle, Washington
- 2 Commander, Army Rocket & Guided Missile Agency, ATTN: Technical
Library, Redstone Arsenal, Alabama
- 1 Commander, Field Command, Defense Atomic Support Agency,
Sandia Base, Albuquerque, New Mexico

DISTRIBUTION LIST (CONTD.)

Copies

- 1 Commander, Ogden Air Materiel Area, OOAMA(OOYTE), Hill Air Force Base, Utah
- 2 Commander, U. S. Naval Missile Center, Point Mugu, California, ATTN: Technical Library
- 1 Commander, U. S. Naval Ordnance Laboratory, White Oak, Silver Spring, Maryland, ATTN: Technical Library
- 2 Commander (Code 12), U. S. Naval Ordnance Test Station, China Lake, California
- 1 Commanding General, ATTN: Technical Library, Building 313, Aberdeen Proving Ground, Maryland
- 2 Commanding General, HQ QM Research & Engineering Command, ATTN: Chief, Special Weapons Protection Branch, Chemicals & Plastics Division, QM Research & Engineering Center, U. S. Army, Natick, Massachusetts
- 1 Commanding General, Ordnance Weapons Command, ATTN: ORDOW-TX, Rock Island, Illinois
- 1 Commanding General, U. S. Army Combat Development Experimentation Center, Fort Ord, California
- 1 Commanding General, U. S. Army Chemical Center and Chemical Corps Materiel Command, ATTN: CMLAM-M-ZP (Chief, Production Branch, DIO), Army Chemical Center, Maryland
- 1 Commanding General, U. S. Army Chemical Corps Research & Development Command, Washington 25, D. C.
- 1 Commanding General, U. S. Army Medical Research & Development Command, ATTN: Major David N. Dalton, Washington 25, D. C.
- 1 Commanding General, U. S. Army Medical Research & Development Command, Main Navy Building, Washington 25, D. C.
- 1 Commanding General, U. S. Continental Army Command, ATTN: Chemical Officer, Fort Monroe, Virginia
- 1 Commanding General, U. S. Continental Army Command, ATTN: DCSMD(MGP), Fort Monroe, Virginia
- 2 Commanding General, White Sands Missile Range, ATTN: ORDBS-OM-Technical Library, New Mexico
- 2 Commanding Officer, Diamond Ordnance Fuze Laboratories, ATTN: ORDTL 012, Washington 25, D. C.
- 1 Commanding Officer and Director (Code L31), U. S. Naval Civil Engineering Laboratory, Port Hueneme, California
- 2 Commanding Officer and Director (Code 222A), U. S. Naval Radiological Defense Laboratory, San Francisco 24, California
- 1 Commanding Officer, Naval Medical Field Research Laboratory, Camp Lejeune, North Carolina, ATTN: Library
- 1 Commanding Officer, Naval Medical Research Institute, National Naval Medical Center, Bethesda 14, Md., ATTN: Security Officer
- 1 Commanding Officer, Ordnance Materials Research Office, Watertown Arsenal, ATTN: RPD, Watertown 72, Massachusetts

DISTRIBUTION LIST (CONTD.)

Copies

- 2 Commanding Officer, Picatinny Arsenal, ATTN: Ordbb-VS3,
Dover, New Jersey
- 1 Commanding Officer, Rocky Mountain Arsenal, ATTN: Chief,
Engineering Division, Denver 30, Colorado
- 2 Commanding Officer, U. S. Army Chemical Corps Biological
Laboratories, ATTN: Technical Information Division, Tech
Library, Fort Detrick, Frederick, Maryland
- 1 Commanding Officer, U. S. Army Chemical Corps Engineering Command,
ATTN: Chief, Engineer, Army Chemical Center, Maryland
- 1 Commanding Officer, U. S. Army Chemical Corps Field Requirements
Agency, Fort McClellan, Alabama
- 1 Commanding Officer, U. S. Army Chemical Corps Proving Ground,
ATTN: Technical Library, Dugway, Utah
- 1 Commanding Officer, U. S. Army Chemical Corps Training Command,
Fort McClellan, Alabama
- 1 Commanding Officer, U. S. Army Environmental Hygiene Agency,
Building 1235, Army Chemical Center, Maryland
- 1 Commanding Officer, U. S. Army Medical Research Laboratory,
Fort Knox, Kentucky
- 1 Commanding Officer, U. S. Army Medical Research & Nutrition
Laboratory, Fitzsimons General Hospital, Denver 30, Colorado
- 1 Commanding Officer, U. S. Army Ordnance, Frankford Arsenal, ATTN:
#0270, Library, Philadelphia 37, Pennsylvania
- 1 Commanding Officer, U. S. Army Ordnance, Frankford Arsenal, ATTN:
Medical Director, Philadelphia 37, Pennsylvania
- 1 Commanding Officer, U. S. Army Signal Research and Development
Laboratories, Fort Monmouth, New Jersey, ATTN: Dr. J. C. Nirschl,
Atomics Branch
- 1 Commanding Officer, U. S. Army Signal Research and Development
Laboratories, ATTN: SIGRA/SL-SAT, Fort Monmouth, New Jersey
- 2 Commanding Officer, U. S. Army Signal Research and Development
Laboratories, ATTN: SIGRA/SL-SAT-4, Fort Monmouth, New Jersey
- 1 Commanding Officer, U. S. Army Signal Research and Development
Laboratories, ATTN: SIGRA/SL-XS, Fort Monmouth, New Jersey
- 1 Commanding Officer, U. S. Army Transportation Research Command,
ATTN: Research Reference Center, Fort Eustis, Virginia
- 1 Commanding Officer, Watertown Arsenal, ATTN: Technical Information
Section, Watertown 72, Massachusetts
- 1 Deputy IG for Safety, AFCNS-M, Kirtland Air Force Base, New Mexico
- 1 Director, Air University Library, ATTN: AUL-8879, Maxwell Air
Force Base, Alabama
- 2 The Director, Armed Forces Institute of Pathology, ATTN: Chief,
Radiation Pathology Branch, Washington 25, D. C.
- 1 Director, Ballistic Research Laboratories, ATTN: ORDBG-T,
Aberdeen Proving Ground, Maryland

DISTRIBUTION LIST (CONTD.)

Copies

- 1 Director, Biological Sciences Division, Office of Naval Research,
Department of the Navy, Washington 25, D. C.
- 2 Director, National Bureau of Standards, Washington 25, D. C.,
ATTN: Dr. L. V. Spencer and Mr. C. Eisenhauer
- 2 Director, Marine Corps Landing Force Development Center,
Marine Corps Schools, Quantico, Virginia
- 1 Director, Material Laboratory, New York Naval Shipyard,
Brooklyn 1, New York, ATTN: Library, Code 912-B
- 1 Director, Oak Ridge National Laboratory, Oak Ridge, Tennessee,
ATTN: Dr. G. S. Hurst, Health Physics Division
- 1 Director, Post Safety Office, Aberdeen Proving Ground, Maryland
- 2 Director, Restricted Weapons Defense Division, U. S. Naval Schools
Command, Treasure Island, San Francisco 30, California
- 1 Director, USA CBR Weapons Orientation Course, Dugway Proving
Ground, Dugway, Utah
- 2 Director, USA Engineer Research & Development Labs, Fort Belvoir,
Virginia, ATTN: Dr. Thomas G. Walsh
- 1 Director, USA Engineer Research & Development Labs, ATTN: Tech-
nical Documents Center, Fort Belvoir, Virginia
- 1 Director, USAF Project RAND, Via: Air Force Liaison Office,
The RAND Corporation, 1700 Main Street, Santa Monica,
California, ATTN: Library
- 1 Director, U. S. Naval Research Laboratory, Washington 25, D. C.,
ATTN: Code 2027
- 1 Director of Special Weapons Development, U. S. Continental
Army Command, Fort Bliss, Texas
- 1 The Director, Weapons Systems Evaluation Group, Room 1E880,
The Pentagon, Washington 25, D. C.
- 1 Directorate of Research and Development, DCS/D, Hq USAF,
Washington 25, D. C., ATTN: AFDRD-HF
- 6 Major R. R. Doddridge, Canadian Army Technical Representative,
Bldg 330, Army Chemical Center, Maryland
- 1 Field Office, U. S. Army Chemical Corps Intelligence Agency,
Bldg T-1502, Army Chemical Center, Maryland
- 1 Headquarters, Air Force Ballistic Missile Division (ARDC), ATTN:
WDTSN-3, Air Force Unit Post Office, Los Angeles 45, California
- 1 Headquarters, Ordnance Ammunition Command, U. S. Army,
ATTN: ORDLY-S, Joliet, Illinois
- 1 Headquarters, Strategic Air Command, ATTN: DINC, Offutt Air Force
Base, Nebraska
- 1 Headquarters, Strategic Air Command, ATTN: SUP3.1, Offutt Air
Force Base, Nebraska
- 1 Headquarters, Tactical Air Command, Langley Air Force Base,
Virginia, ATTN: TMEM-AM
- 1 Headquarters, Tactical Air Command, Langley Air Force Base,
Virginia, ATTN: TOOT-T

DISTRIBUTION LIST (CONTD.)

Copies

- 1 Headquarters, Tactical Air Command, Langley Air Force Base,
Virginia, ATTN: TPL-RQD
- 1 Headquarters, USAF, Director of Operations, AFOOP-CP,
Washington 25, D. C.
- 1 Headquarters, U. S. Army Ordnance Tank-Automotive Command,
ATTN: ORDMC-REM, 1501 Beard Street, Detroit 9, Michigan
- 6 Mr. Ronald Holmes, Defense Research Staff/TW, British Embassy,
3100 Massachusetts Avenue, N. W., Washington 8, D. C.
- 1 Los Alamos Scientific Laboratory, ATTN: Report Librarian,
P. O. Box 1663, Los Alamos, New Mexico
- 3 Technical Operations, Inc., Burlington, Massachusetts, ATTN:
Dr. Eric T. Clarke, Vice President, Mr. Dominic Raso,
Mr. John F. Batter, Jr.
- 1 The Martin Company, ATTN: Science-Technology Library,
Mail J 398, Baltimore 3, Maryland
- 1 392d Medical Group (SAC), ATTN: SUDP3, Vandenberg Air Force,
California
- 1 Medical Information & Intelligence Agency, U. S. Army Medical
Service, ATTN: Director, Washington 25, D. C.
- 1 Office, Assistant for Veterinary Services, Office of the Surgeon
General, Department of the Army, Washington 25, D. C.
- 1 Office of the Chief Chemical Officer, ATTN: Chief, Safety
Branch, Department of the Army, Washington 25, D. C.
- 1 Office Chief of Ordnance, Department of the Army, ATTN: ORDGU-SA,
Washington 25, D. C.
- 1 Office Chief of Ordnance, Research & Development Division,
Research Branch (ORDTB), Washington 25, D. C.
- 1 Office, Chief of Transportation, ATTN: Concepts and Doctrine
Division, Washington 25, D. C.
- 1 Office of Civil and Defense Mobilization, 17th and F. Streets,
Washington, D. C., ATTN: Mr. Neil FitzSimons
- 1 Office of the Senior Standardization Representative, U. S. A.
Standardization Group, Canada, c/o Directorate of Weapons &
Development, Canadian Army Headquarters, Ottawa, Canada
- 1 Office of the Surgeon (MCD), Headquarters, Air Materiel Command,
Wright-Patterson Air Force Base, Ohio
- 1 Officer in Charge, U. S. Naval Explosive Ordnance Disposal Techni-
cal Center, U. S. Naval Propellant Plant, Indian Head, Maryland,
ATTN: Army Chemical Liaison Officer
- 1 Operations Research Office, The Johns Hopkins University, ATTN:
Document Control Office, 6935 Arlington Road, Bethesda 14, Md.
- 1 Post Surgeon, Rocky Mountain Arsenal, Denver 30, Colorado
- 1 President, U. S. A. Arctic Test Board, APO 733, Seattle, Wash.
- 1 President, U. S. A. Armor Board, Fort Knox, Kentucky
- 1 President, U. S. A. Chemical Corps Board, Building 483, Army
Chemical Center, Maryland

DISTRIBUTION LIST (CONTD.)

Copies

- 1 President, U. S. Army Infantry Board, Fort Benning, Georgia
- 1 President, U. S. Army Airborne & Electronics Board,
Fort Bragg, North Carolina
- 1 President, U. S. Army Air Defense Board, Fort Bliss, Texas
- 1 President, U. S. Naval War College, Newport, Rhode Island
- 1 Radiation Effects Information Center, Battelle Memorial
Institute, 505 King Avenue, Columbus 1, Ohio
- 1 Sandia Corporation, Sandia Base, Albuquerque, New Mexico
- 2 School of Aviation Medicine, USAF, ATTN: SAMRSCH-P,
Brooks Air Force Base, Texas
- 1 Senior Army Representative, Department of Health, Education
and Welfare, Room 5412, South Building, Washington 25, D. C.
- 1 Senior Standardization Representative, U. S. Army Standardiza-
tion Group-UK, ATTN: Chemical Representative, Box 65,
USN 100, FPO, New York, New York
- 1 Supervisor, Industrial Hygiene Engineering Group, Boeing
Airplane Company, P. O. Box 3822, Mail Stop 45-04,
Seattle 24, Washington
- 2 Technical Library, Room G-2B, Office of Civil and Defense
Mobilization, ATTN: Director, Technical Library,
Battle Creek, Michigan
- 2 3415th Technical School, USAF(TORF), Lowry Technical Training
Center, (ATC), Lowry Air Force Base 30, Colorado
- 1 University of California Engineering Field Station, Berkeley,
California, ATTN: Dr. R. W. Sheppard
- 1 University of California, Division of Nuclear Engineering,
Berkeley, California, ATTN: Professor N. W. Snyder
- 1 U. S. Army Chemical Corps Advisory Council, Building 330,
Army Chemical Center, Maryland
- 5 U. S. Atomic Energy Commission, Office of Technical Information
Extension, Post Office Box 62, Oak Ridge, Tennessee
- 6 U. S. CONARC Liaison Officer, Building 330, Army Chemical
Center, Maryland
- 1 Walter Reed Army Institute of Research, Walter Reed Army
Medical Center, Washington 12, D. C.
- 10 Commander, Armed Services Technical Information Agency,
ATTN: TIPCR, Arlington Hall Station, Arlington 12, Virginia
- 1 Commanding General, Headquarters, U. S. Continental Army
Command, Fort Monroe, Virginia, ATTN: ATTN
- 20 Author

UNCLASSIFIED

UNCLASSIFIED

AD _____ Accession No. _____
Nuclear Testing Division, U. S. Army Chemical Corps
Nuclear Defense Laboratory, Army Chemical Center, Maryland

COLD WEATHER DECONTAMINATION STUDY - McCOY I
Joseph C. Maloney and John L. Meredith

NDL-TR-24, January 1962
Project 4X12-01-001-02, UNCLASSIFIED REPORT

The objective of this work was to obtain data on the efficiency of decontamination techniques under below-freezing conditions when applied to outdoor surfaces. Fallout simulant was prepared by tagging 150 μ to 300 μ sand with lanthanum-140. The simulant was then dispersed onto snow, frozen soil, and roof surfaces. The techniques of fire hosing, snow plowing, and power sweeping were tested. The experimental effort was limited by improper weather conditions.

1. Decontamination
2. Radioactive Fallout
3. Climate, Cold
4. Engineer Equipment

UNCLASSIFIED

UNCLASSIFIED

AD _____ Accession No. _____
Nuclear Testing Division, U. S. Army Chemical Corps
Nuclear Defense Laboratory, Army Chemical Center, Maryland

COLD WEATHER DECONTAMINATION STUDY - McCOY I
Joseph C. Maloney and John L. Meredith

NDL-TR-24, January 1962
Project 4X12-01-001-02, UNCLASSIFIED REPORT

The objective of this work was to obtain data on the efficiency of decontamination techniques under below-freezing conditions when applied to outdoor surfaces. Fallout simulant was prepared by tagging 150 μ to 300 μ sand with lanthanum-140. The simulant was then dispersed onto snow, frozen soil, and roof surfaces. The techniques of fire hosing, snow plowing, and power sweeping were tested. The experimental effort was limited by improper weather conditions.

1. Decontamination
2. Radioactive Fallout
3. Climate, Cold
4. Engineer Equipment

UNCLASSIFIED

UNCLASSIFIED

AD _____ Accession No. _____
Nuclear Testing Division, U. S. Army Chemical Corps
Nuclear Defense Laboratory, Army Chemical Center, Maryland

COLD WEATHER DECONTAMINATION STUDY - McCOY I
Joseph C. Maloney and John L. Meredith

NDL-TR-24, January 1962
Project 4X12-01-001-02, UNCLASSIFIED REPORT

The objective of this work was to obtain data on the efficiency of decontamination techniques under below-freezing conditions when applied to outdoor surfaces. Fallout simulant was prepared by tagging 150 μ to 300 μ sand with lanthanum-140. The simulant was then dispersed onto snow, frozen soil, and roof surfaces. The techniques of fire hosing, snow plowing, and power sweeping were tested. The experimental effort was limited by improper weather conditions.

1. Decontamination
2. Radioactive Fallout
3. Climate, Cold
4. Engineer Equipment

UNCLASSIFIED

UNCLASSIFIED